



---

# Vanguard Applications Ware Basic Protocols

## Configuring with PAD/ATPAD

# Notice

---

©2008 Vanguard Networks  
25 Forbes Blvd  
Foxboro, MA 02035  
Phone: (508) 964 6200  
Fax: (508) 543 0237  
All rights reserved  
Printed in U.S.A.

## **Restricted Rights Notification for U.S. Government Users**

---

The software (including firmware) addressed in this manual is provided to the U.S. Government under agreement which grants the government the minimum “restricted rights” in the software, as defined in the Federal Acquisition Regulation (FAR) or the Defense Federal Acquisition Regulation Supplement (DFARS), whichever is applicable.

If the software is procured for use by the Department of Defense, the following legend applies:

### **Restricted Rights Legend**

Use, duplication, or disclosure by the Government  
is subject to restrictions as set forth in  
subparagraph (c)(1)(ii) of the  
Rights in Technical Data and Computer Software  
clause at DFARS 252.227-7013.

If the software is procured for use by any U.S. Government entity other than the Department of Defense, the following notice applies:

### **Notice**

Notwithstanding any other lease or license agreement that may pertain to, or accompany the delivery of, this computer software, the rights of the Government regarding its use, reproduction, and disclosure are as set forth in FAR 52.227-19(C).

Unpublished - rights reserved under the copyright laws of the United States.

## Notice (continued)

---

### Proprietary Material

---

Information and software in this document are proprietary to Vanguard Managed Solutions (or its Suppliers) and without the express prior permission of an officer of VanguardMS, may not be copied, reproduced, disclosed to others, published, or used, in whole or in part, for any purpose other than that for which it is being made available. Use of software described in this document is subject to the terms and conditions of the Vanguard Managed Solutions Software License Agreement.

This document is for information purposes only and is subject to change without notice.

Part No. T0110, Rev J  
Publication Code TK  
First Printing November 1998

This manual is current for Release 7.3 of Vanguard Applications Ware.

To comment on this manual, please send e-mail to [vntechsupport@vanguardnetworks.com](mailto:vntechsupport@vanguardnetworks.com)



## Contents

---

About Packet Assembler/Disassembler .....	2
Applications.....	3
PAD Port Configuration .....	6
PAD Port Record Parameters .....	8
PAD Port Configuration for Autocalling .....	22
PAD Port Configuration for Autospeed .....	24
PAD XON/OFF Support Using X.25 Interrupt Packets.....	25
PAD Prompt Table Record .....	26
PAD Prompt Table Record Parameters .....	27
PAD Profile Table Record .....	28
PAD Profile Table Record Parameters .....	30
Copying PAD Profile Tables into a Configuration.....	44
Remote PAD Parameter Table Record .....	49
Remote PAD Parameter Table Record Parameters .....	50
Detailed PAD Port Statistics .....	53
ATPAD Ports .....	56
ATPAD Operation .....	56
ATPAD Port Record Parameters .....	60
ATPAD Port Statistics .....	69



## Overview

### Introduction

This manual describes the PAD and ATPAD port configurations for Vanguard products. It includes explanations of both PAD port types, commands that can be used, and how to configure a node for either PAD or ATPAD operation.

### Before You Begin

Before you can configure parameters, you must log on to the local node's control terminal port. Refer to the *Vanguard Configuration Basics Manual* for CTP procedures.

### In This Manual

Topic	See Page
About Packet Assembler/Disassembler.....	2
Applications.....	3
PAD Port Configuration .....	6
PAD Port Record Parameters .....	8
PAD Port Configuration for Autocalling .....	22
PAD Port Configuration for Autospeed .....	24
PAD XON/OFF Support Using X.25 Interrupt Packets.....	25
PAD Prompt Table Record .....	26
PAD Prompt Table Record Parameters .....	27
PAD Profile Table Record .....	28
PAD Profile Table Record Parameters .....	30
Copying PAD Profile Tables into a Configuration.....	44
Remote PAD Parameter Table Record .....	49
Remote PAD Parameter Table Record Parameters .....	50
Detailed PAD Port Statistics .....	53
ATPAD Ports .....	56
ATPAD Operation .....	56
ATPAD Port Record Parameters .....	60
ATPAD Port Statistics .....	69

## About Packet Assembler/Disassembler

---

### What is a PAD?

A Packet Assembler/Disassembler (PAD) provides network access and ensures compatibility between different hosts and terminals and a packet switched network. A PAD does this by packetizing data (Assembling) sent to the PAD from a terminal device, and then routing that packetized data through a packet switching node and onto the network.

A PAD can also de-packetize (Disassemble) data it receives from the network before it is sent to the destination (host or terminal).

---

### What Is a PAD Port?

A PAD port lets you transmit asynchronous data. When setting the Port Type to PAD, the remainder of the Port Record contains only those parameters needed for configuring the PAD port.

In this record, you can configure a PAD port for the following:

- Autocalling
  - Autospeed
  - Address blanking
- 

### What is an ATPAD

The ATPAD is an asynchronous port that lets you make and clear X.25 calls using a restricted set of Hayes AT commands.

---

### Features

PAD ports provide these features:

- A set of commands to make and clear calls
  - A set of response codes that indicate the generation condition
  - Other features such as configurable control characters, data forwarding criteria, and answer mode for tailoring the ATPAD to your application
  - Support for network parity, response delay, and DTR timeout
  - Configurable Escape Sequence Timer
  - Automatic or manual answer
  - Four stored X.25 addresses (mnemonics) accessible by the ATDSn command
  - Control signal or XON/XOFF flow control
  - Configuration of operating parameters via the CTP
-




## Applications

### Introduction

This section explains how PAD ports are used. It describes a typical application as well as an application where MBC protocol is supported on Vanguard 6560s.

### Typical PAD Application

Figure 1 shows the use of modems in an application. It also shows how a Vanguard with the PAD port replaces the modems and concentrates mixed data types on a single access line. A PC runs purchased script files that use AT commands.

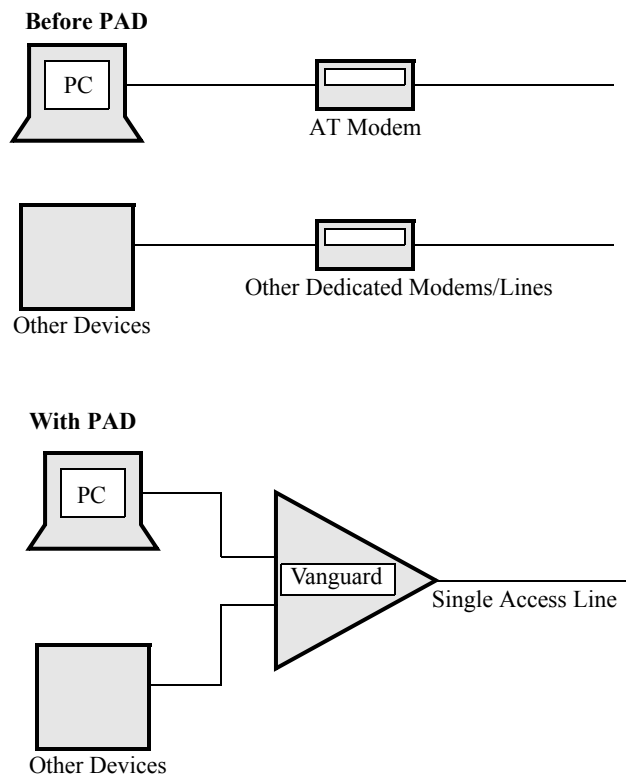

**Figure 1. Topologies With and Without the PAD**

#### ■ Note


You can access the PAD with PC scripts. The PC scripts use AT commands to make calls through an X.25 network.

**MBC Protocol on 6560s**

The MBC Protocol is used in banking networks where multiple branch offices are connected to the central site office through a Frame Relay network (with ISDN backup). The MBC Protocol is supported on Vanguard 6560s.


To understand how MBC Protocol support can be used, consider the examples shown in Figures 2 and 3 where Vanguard 6560s connect an IBM host to the Frame Relay network.

In Figure 2 the branch office uses a Vanguard 6520 to connect its polling controller equipment (BP) to the Frame Relay network. The 6520 runs the SDLC protocol on the line to the BP. The BP in turn connects to a line controller called the MBC which is connected to multiple devices (ATM machines, cash dispensers, and terminals). The MBC protocol runs between the BP and the devices.

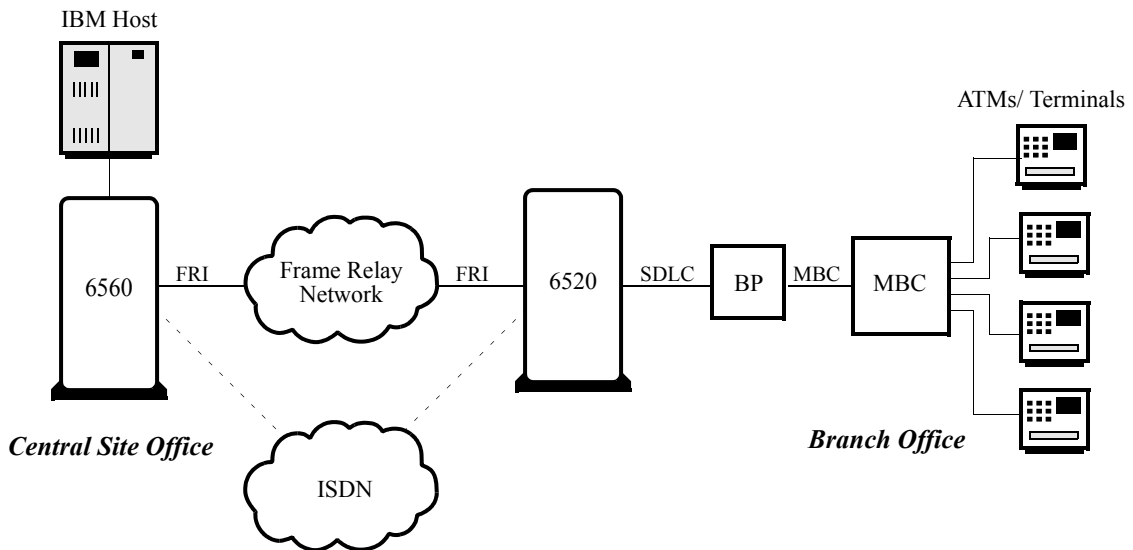

**Figure 2. With MBC Support on 6560**

Figure 3 shows a network where the branch office does not have a BP polling controller. Instead the BP reside at the central site. In this example, the MBC protocol frames need to be transported across the Frame Relay network using a 6560 that supports the MBC protocol.

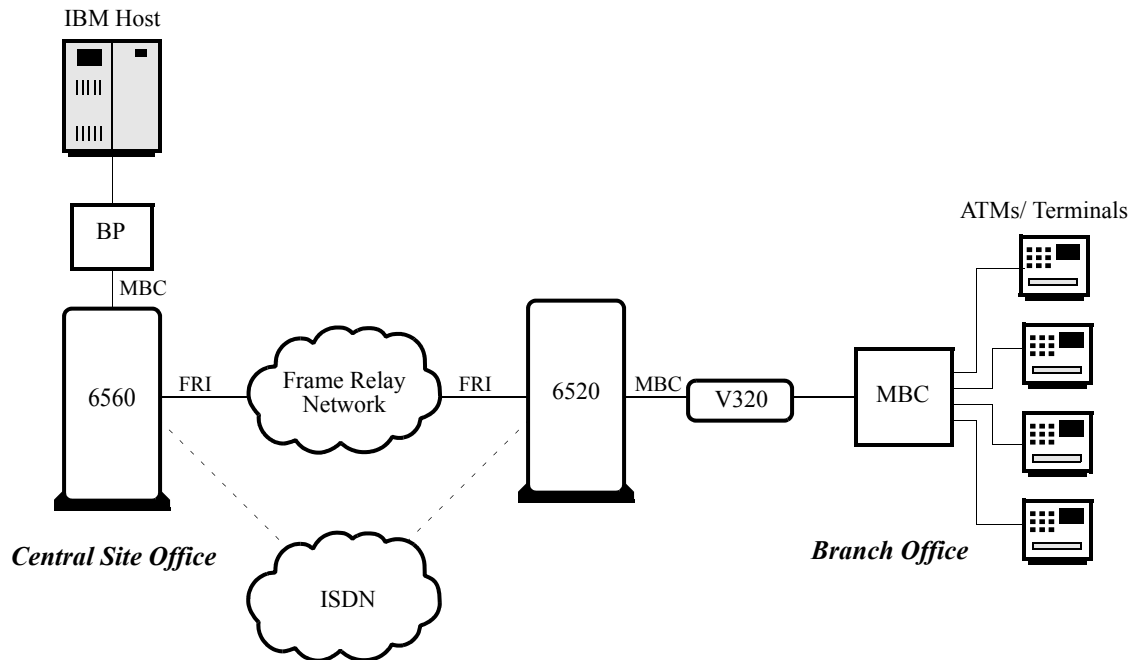

**Figure 3. MBC Protocol Support on 6560**

### Configuring 6560 for MBC Protocol

To configure a 6560 for MBC support you must go to the PAD Port Record and the PAD Profile Table and set these parameters to the following values:

<b>Parameter</b>	<b>Value</b>
<b>PAD Port Record Parameters</b>	
Port Speed	9600 or 19200 (depending on the terminal)
Call Control	Auto
Terminal Control	Hennis
Autocall Mnemonic	the mnemonic mapped to the remote PAD port
Inter-Character Timeout	0 (This parameter appears only when Terminal Control = Hennis.)
<b>PAD Profile Table</b>	
Dynamic Data Forwarding	1
PAD Mode	<ul style="list-style-type: none"> <li>• 1 (on PADs attached to the BP)</li> <li>• 2 (on PAD attached to MBC)</li> </ul>

#### ■ Note

The table lists only those parameters that effect the MBC Protocol. Other PAD Port and PAD Profile parameters must be set as part of the configuration process.

# PAD Port Configuration

## Introduction


To configure a PAD port, you must first access the CTP on your Vanguard device.

**Note**

Refer to the *Vanguard Configuration Basics Manual* for CTP procedures.

## PAD Port Configuration Record

Figure 4 shows the PAD port configuration parameters.

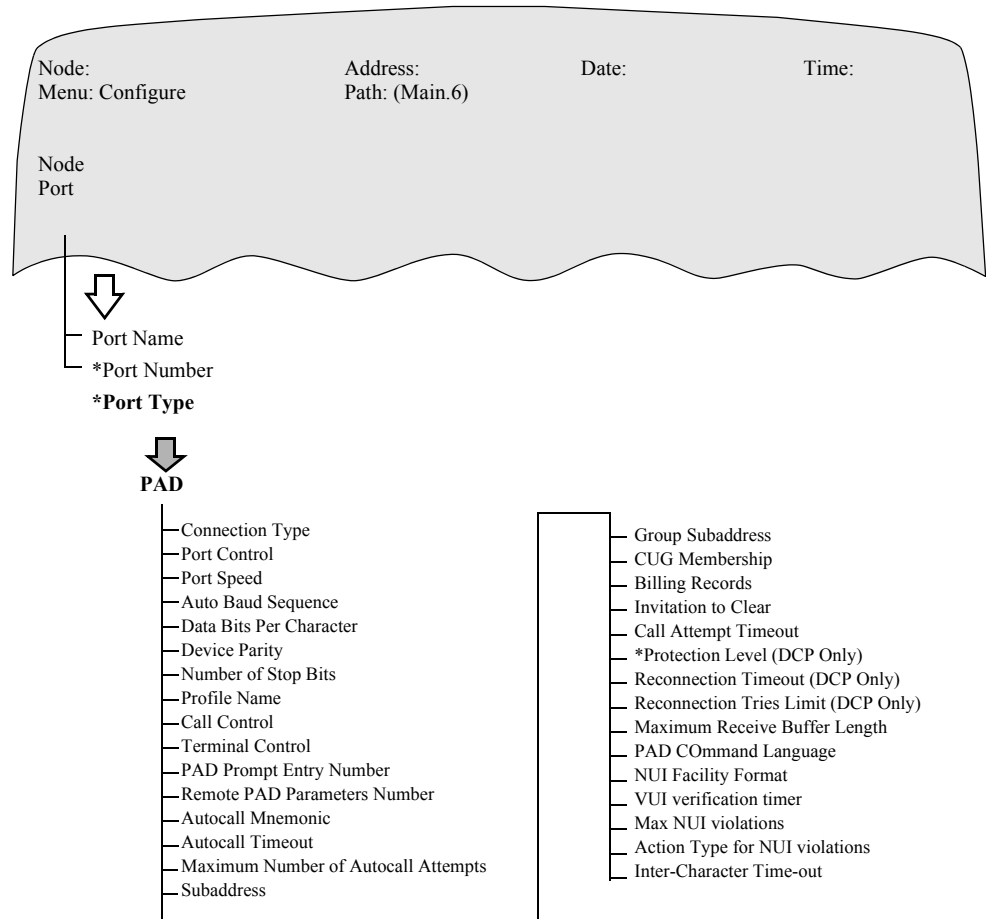

**Figure 4. PAD Port Record**

**Guidelines**

Follow these guidelines for configuring other PAD port parameter:

<i><b>If You Specify or Set...</b></i>	<i><b>Then...</b></i>
Profile Name	The entry must exist in the PAD Profile Table.
Call Control to AUTO or AUTC	Autocall Mnemonic must have a value.
Call Control = AUTO and (Port Record) Connection Type = SIMP,	Maximum Number of Autocall Attempts must be 0.
Ports as having Call Control = AUTO	Configure each port to have different values for Autocall Timeout.
Terminal Control to PASS	An NUI Table entry must exist.
Terminal Control to CUG	An entry for CUG Membership must exist.
PAD Prompt Entry Number	The entry must exist in the PAD Prompt table.
Remote PAD Parameters Number	The entry must exist in the Remote PAD Parameters Table.
Autocall Mnemonic	The entry must exist in the Mnemonic Table.
A Subaddress value	It should equal the port number.
Billing Records as On	A Billing Printer Mnemonic must be specified in the Mnemonic Table.

**Other Tables You Must Configure**

If your port type is PAD Port, you must also configure parameters in these tables:

- PAD Profile Table (see “PAD Profile Table Record” section on page 28)
- PAD Prompt Table (see “PAD Prompt Table Record” section on page 26)

**Accessing the Record**

Follow these steps to access the PAD Port Record:

<i><b>Step</b></i>	<i><b>Action</b></i>	<i><b>Result</b></i>
<b>1</b>	Select <b>Configure</b> from the CTP Main menu.	The Configure menu appears.
<b>2</b>	Select <b>Port</b> from the Configure menu and configure the Port Number in the Port Record.	The prompt for the Port Number appears
<b>3</b>	Enter port type: <b>PAD</b>	The first parameter for PAD Port Type appears, as shown in Figure 4.
<b>4</b>	Enter each parameter value and save the record. Press <b>&lt;ESC&gt;</b> to return to the Configure menu.	

## PAD Port Record Parameters

### Introduction

This section describes the PAD port parameters. Any parameter with an asterisk (\*) requires a Node boot.

#### ■ Note

If you have enabled Ease of Configuration, you need to boot only the port to make changes to the parameters marked with an asterisk. For more information, refer to the Ease of Configuration section in the introductory portion of the *Basic Protocols Manual*, (Part Number T0106).

### Parameters

These are the port parameters when Port Type is set to PAD:

#### \*Port Type

Range:	NULL, PAD, ATPAD, X25
Default:	PAD
Description:	Specifies the port type. <ul style="list-style-type: none"> <li>• NULL: NULL port</li> <li>• PAD: PAD port</li> <li>• ATPAD: ATPAD port</li> <li>• X25: X.25 port</li> </ul>

#### Connection Type

Range:	SIMP, DTR, DTRD, DTRP, DIMO, DIMOa, DIMOb, EMRI, EMDC, EMCDIO
Default:	SIMP
Description:	Specifies the type of control signal handshaking that is required before logical connections can be made to this port. See the table below for information about when to use a connection type.

<b>Use Connection Type</b>	<b>When...</b>
SIMP (Simple)	A terminal is wired to the port with a cable that has a minimum of conductors (so most control signals are missing). Such cabling provides only ground, transmit, and receive data. Control signals from the port are maintained high. If data restraint by control signal is enabled, the CTS lead changes as required.
DTR	The device connected to the port provides DTR to maintain the EIA connection. Remote users calling the device through a PAD port know if the device is disconnected or powered down, because the call is not completed.

<b>Use Connection Type</b>	<b>When... (continued)</b>
DTRD	DTR signal required. DCD, DSR, CTS drop for 1 second between calls and then return to idle state. During the control signal drop, the port is unable to receive calls.
DTRP	<ul style="list-style-type: none"> <li>• DTR is passed end-to-end.</li> <li>• Port raises CTS and DCD when it raises DSR. The port does not monitor RTS.</li> <li>• EIA Monitor supports DTRP.</li> <li>• DTRP doesn't support PVC connections.</li> <li>• Configure PAD ports as an answer/originate pair by selecting auto calling on the originate end.</li> <li>• Supports primary handshaking only (DTR/DSR) and should not be used with tail circuit modems.</li> </ul>
DIMO	<p>A crossover cable attaches a dial modem to the port, and whose handshake uses modem control signals as calls are made. These are the types of DIMO operation:</p> <ul style="list-style-type: none"> <li>• Dial In: Calls received from the telephone network.</li> <li>• Dial Out: Calls received from the port.</li> <li>• Dial In/Dial Out Collision: Calls received simultaneously from the telephone network and the port.</li> </ul>
DIMOa	Same as DIMO but DSR is not raised on incoming calls.
DIMOb	Same as DIMO but DSR follows DTR on incoming calls.
EMRI	A port connects to a host computer and replaces a modem. The port emulates a dial modem with Ring Indicator (RI).
EMDC	A port connects to a host computer and replaces a modem. The port emulates a dial modem with Data Carrier Detect (DCD) used to signal an incoming call.
EMCDIO	A port connects to an asynchronous host computer and emulates a modem with DCD for incoming and outgoing calls.

### Port Control

Range:	NONE, MB
Default:	NONE
Description:	<ul style="list-style-type: none"><li>• MB: Enables the make-busy feature for the specified port; disabling the port raises pin 22 only when Connection Type = DIMO, DIMOa, DIMOb, DTR, DTRD, or SIMP.</li><li>• NONE: Disables this parameter.</li></ul>

### Port Speed

Range:	50, 75, 100, 110, 134, 150, 200, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 14400, 19200, 28800, 38400, 75/1200, AUTO
Default:	9600
Description:	<p>Specifies the port speed in bits per second.</p> <ul style="list-style-type: none"><li>• Port speed is set by this parameter although the PAD Profile Table can specify a PAD port's characteristics.</li><li>• When 134 is selected, the actual speed is 134.5 bps.</li><li>• Split speed (75/1200) can be configured only on 6500<sup>PLUS</sup> Processor and Asynchronous I/O Cards.</li></ul>



**Auto Baud Sequence**

Range:	CR_ONLY, CR_DOT_CR, TYMNET, TELENET
Default:	CR_ONLY
Description:	<p>Specifies these character sequences used for autospeed recognition:</p> <ul style="list-style-type: none"> <li>• CR_Only: Autospeed on &lt;CR&gt;</li> <li>• CR_DOT_CR: Autospeed on &lt;CR&gt;.&lt;CR&gt;</li> <li>• TYMNET: Autospeed on the letter "a" (must be lower case)</li> <li>• TELENET: Autospeed on &lt;CR&gt;&lt;CR&gt; for 1200 bps or lower and @ &lt;CR&gt; for 2400 bps or higher</li> <li>• DOT_DOT_CR: autospeed on two or three dots followed by &lt;CR&gt;</li> <li>• SP_P_CR: autospeed on " P&lt;CR&gt;"</li> </ul> <p>This parameter only impacts autospeed PAD ports with the following configuration settings:</p> <ul style="list-style-type: none"> <li>• Port Speed = AUTO</li> <li>• Device Parity = Auto</li> <li>• Data Bits Per Character = 7</li> </ul> <p>The speeds are supported on the 6500<sup>PLUS</sup>, Vanguard 6520, and Vanguard platforms. The autospeeds of 14.4 Kbps, 19.2 Kbps, 28.8 Kbps, and 38.4 Kbps are not supported on UIO/AIO cards.</p> <ul style="list-style-type: none"> <li>• Used to detect and adapt to the speed and parity of a terminal configured as 7 bit plus parity.</li> <li>• Select CR_DOT_CR if the connecting terminal's Data Bits per Character (7 or 8) is unknown or changes (typical for dial-in applications).</li> </ul>

### Data Bits per Character

Range:	5 to 8
Default:	8
Description:	Sets the bits per character. This value must match the number of bits per character used by the attached device.

### Device Parity

Range:	NONE, SPAC, MARK, EVEN, ODD, AUTO
Default:	NONE
Description:	<p>Specifies the type of parity the PAD port generates and returns from the attached device:</p> <ul style="list-style-type: none"> <li>• NONE: With 7-bit data or when the data is 7 bits with parity, and the parity bit is passed to the remote end as the eighth bit.</li> <li>• SPAC: Space parity.</li> <li>• MARK: Mark parity.</li> <li>• EVEN: Even parity.</li> <li>• ODD: Odd parity.</li> <li>• AUTO: When the port is configured for autospeed, this supports 7 bits odd, 7 bits even, and 7 bits ignore.</li> <li>• AUTOA: When the port is configured for autospeed, this supports 7 bits odd, 7 bits even, and 8 bits none.</li> </ul>

### Number of Stop Bits

Range:	1, 1.5, 2
Default:	1
Description:	<p>Specifies the number of Stop Bits that the PAD port generates when it sends data to the attached device.</p> <p>This parameter has no effect on data received from the attached device.</p>

### Profile Name

Range:	0 to 8 alphanumeric characters
Default:	0
Description:	The name of the PAD Profile Table used by this port. Choose from one of the names in PAD Profile Table or 12 Default Profiles.

**Call Control**

Range:	NONE, AUTO, AUTC, PCUD, IBAR, OBAR, MNEM, TMNEM, EMNEM
Default:	NONE
Description:	<p>Specifies PAD behavior and limitations when making and receiving calls:</p> <ul style="list-style-type: none"> <li>• NONE: No options</li> <li>• AUTO: Automatically places a call when an EIA connection is established</li> <li>• AUTC: Automatically places a call when &lt;CR&gt; is received</li> <li>• PCUD: Pass Call User Data (CUD) to user profile for no service signals</li> <li>• IBAR: Bar calls inbound from PAD user</li> <li>• OBAR: Bar calls outbound to PAD user</li> <li>• MNEM: Place only mnemonic calls</li> <li>• EMNEM: allow extended mnemonic call (without dot)</li> <li>• TMNEM: Call mnemonic (maximum 16 alphanumeric characters) that is not resolved in the local node. This option cannot be summed with any of the above options.</li> </ul> <p>These events occur when you sum AUTO+IBAR+PCUD:</p> <ul style="list-style-type: none"> <li>• Automatic calling is in effect.</li> <li>• Call User Data passes from the user with no service signals.</li> <li>• Incoming calls are not accepted by that user.</li> </ul> <p><b>■ Note</b> Do not sum IBAR and OBAR because, when combined, they render the port useless.</p>

**Terminal Control**

Range:	NONE, PASS, LIM, CUG, LCPY, 7BIT, NADD, X.28, CNUI, CUGOA, BMSG, ADDR, FRCB, CUGIA, HENNIS
Default:	NONE
Description:	<p>Specifies options for the attached device:</p> <ul style="list-style-type: none"> <li>• NONE: No option specified</li> <li>• PASS: A password is required (configured in the NUI/ Password Table).</li> <li>• DNP1: Support DATAPAC 3101 compatible prompts.</li> <li>• LIM: X.28 mode is limited to CALL and CLR commands.</li> <li>• CUG: Check Closed User Group (CUG); otherwise the CUG passes transparently.</li> <li>• LCPY: Allow local copying to this PAD port</li> <li>• 7BIT: Allows an internal 7-bit representation of characters to determine if extra processing is needed. <ul style="list-style-type: none"> <li>– <u>Example</u>: The line delete character is hexadecimal value 18, and the input character received by the PAD is hexadecimal 98. If 7BIT is not selected, the current input line is not deleted. If 7BIT is selected, the input line is deleted as the internal representation of the character would only be 7 bits.</li> </ul> </li> <li>• NADD: Prevents PAD port from receiving calling address and facility's service signals</li> <li>• X28: Automatically returns from X.28 mode to PAD mode after sending the X.28 commands</li> <li>• CNUI: Provides Centralized Network User Identification verification.</li> <li>• CUGOA: Subscribe to Closed User Group with Outgoing Access.</li> <li>• BMSG: Displays the PAD Bulletin/Banner Message.</li> <li>• ADDR: The calling address is not shown.</li> <li>• FRCB: Connects to a French Cartes Bancaires (banking card) device.</li> <li>• CUGIA: Checks the CUG but allows incoming access; otherwise CUG data is passed transparently.</li> <li>• HENNIS: Allows MBC Protocol support on 6560.</li> </ul> <p>■ <b>Note</b> Use summing to combine several parameter values. CUGOA and CUG or CUG and CUGIA cannot be used together.</p>

**PAD Prompt Entry Number**

Range:	0 to 8
Default:	0
Description:	Specifies the customized prompt from the PAD Prompt Table. This parameter is ignored when Terminal Control = PASS and the PAD Prompt Entry Number is taken from the NUI/Password Table entry.

**Remote PAD Parameters Number**

Range:	0 to 6
Default:	0
Description:	Specifies the Remote PAD Parameter Table entry number that is used by the remote PAD to update its X.3 characteristics when connected to this port. No updates are sent if this parameter is set to zero (0).

**Autocall Mnemonic**

Range:	0 to 8 alphanumeric characters
Default:	N/A
Description:	The mnemonic name that is used when the port is configured for autocalling.  <b>■Note</b> A corresponding entry must be made in the Mnemonic Table.

**Autocall Timeout (sec)**

Range:	5 to 255
Default:	10
Description:	Specifies the time (in seconds) between call attempts when autocalling.

**Autocall Timeout (sec)**

Range:	5 to 255
Default:	10
Description:	Specifies the time (in seconds) between call attempts when autocalling.

### Maximum Number of Autocall Attempts

Range:	0 to 255
Default:	4
Description:	Specifies the number of times the PAD port attempts to call when autocalling is enabled. When the limit is reached, the port stops attempting to make a call. For unlimited call attempts, set to 0.

### Subaddress

Range:	0 to 3 digits
Default:	port #
Description:	Specifies the subaddress for this PAD port. Incoming calls from the network with a network address consisting of the Node Address specified in the Node Record and this subaddress, arrive at this PAD port.

### Group Subaddress

Range:	0 to 3 digits
Default:	00
Description:	Specifies a port subaddress that several PAD ports share. Incoming calls with this subaddress are routed to one of several ports sharing this subaddress. To disable this parameter, set to (blank). Use the space bar to blank the parameter value.

### CUG Membership

Range:	0 to 8 two-digit numbers
Default:	--,--,--,--,--,--,--
Description:	Specifies a port's membership in up to 8 Closed User Groups (CUGs). <ul style="list-style-type: none"> <li>• Each CUG membership must be a two-digit number (00 to 99), separated from other groups by a comma.</li> <li>• To delete a CUG, press the minus key twice for each group.</li> </ul>

**Billing Records**

Range:	OFF, ON
Default:	OFF
Description:	<ul style="list-style-type: none"> <li>• ON: generates billing records for all calls to and from this port and for failed calls from this port.</li> <li>• OFF: generates no billing records.</li> </ul> <p>■ <b>Note</b> This parameter only takes effect when you have configured Billing Printer Mnemonic in the Node record.</p>

**Invitation to clear**

Range:	NONE, CLRWO, CLRWD
Default:	CLRWO
Description:	<p>Specifies how an Invitation to Clear packet is handled when received:</p> <ul style="list-style-type: none"> <li>• NONE: Do nothing.</li> <li>• CLRWO: Clear Call without performing EIA disconnect.</li> <li>• CLRWD: Clear Call and perform EIA disconnect.</li> </ul>

**Call Accept Timeout (sec)**

Range:	0 to 255
Default:	0
Description:	<p>Specifies the time (in seconds) that the PAD port can be idle (no calls) before it is disconnected. Zero (0) disables the timer.</p> <p>Use this parameter to prevent a dial connection from being disconnected during short periods of inactivity.</p>

**\*Protection Level**

Range:	NONE, CP_ONLY, FULL_DCP
Default:	NONE
Description:	<p>Specifies how Data Connection Protection is implemented for this port:</p> <ul style="list-style-type: none"> <li>• NONE: The feature is turned off.</li> <li>• CP_ONLY: Connection protection only.</li> <li>• FULL_DCP: Full data and connection protection.</li> </ul> <p>Valid only when the Data Connection Protection Option has been purchased for this node.</p> <p><b>■ Note</b> Changes to this parameter require a Node boot to take effect.</p>

**Reconnection Timeout**

Range:	1 to 128
Default:	2
Description:	<p>Specifies how long (in seconds) the Data Connection Protection feature waits between reconnection attempts. The call originator determines the value.</p> <p>If symmetric operation is required, the Reconnection Timeout and the Reconnection Tries limit should be equal.</p> <p>Valid only when the Data Connection Protection Option has been purchased for this node.</p>

**Reconnection Tries Limit**

Range:	0 to 127
Default:	4
Description:	<p>Specifies the number of times that the Data Connection Protection feature attempts to reconnect before clearing the call.</p> <p>The call originator determines the value.</p> <p>If 0 is entered, there is no attempt to reconnect.</p> <p>If symmetric operation is required, the Reconnection Timeout and the Reconnection Tries limit should be equal.</p> <p>Valid only when the Data Connection Protection Option has been purchased for this node.</p>



**Maximum Receive Buffer Length**

Range:	1 to 128 (2000 with TPA 2K Frame Size CSK enabled)
Default:	128
Description:	<p>Specifies the number of characters received by the driver before forwarding the packet.</p> <p>■ <b>Note</b>                      If a port is configured as Transparent Polled Async PAD and CSK for TPA 2K Frame Size is enabled, the maximum frame size for this parameter is automatically set to 2K.</p>

**Called DTE Address**

Range:	0 to 15 decimal digits
Default:	00000000
Description:	<p>Specifies the Called DTE Address for packets with call mnemonic.</p> <p>■ <b>Note</b>                      Use the space character to blank the field.</p>

**Calling DTE Identifier**

Range:	0 to 8 alphanumeric characters
Default:	(blank)
Description:	<p>Specifies the Calling DTE Identifier for packets with call mnemonic.</p> <p>■ <b>Note</b>                      Use the space character to blank the field.</p>

**Calling DTE Password**

Range:	0 to 8 alphanumeric characters.
Default:	(blank)
Description:	<p>Specifies the Calling DTE Password for packets with call mnemonic.</p> <p>■ <b>Note</b>                      Use the space character to blank the field.</p>

### PAD Command Language

Range:	CCITT, DPN
Default:	CCITT
Description:	Specifies the language used for PAD commands. <ul style="list-style-type: none"> <li>• CCITT: X.28 CCITT</li> <li>• DPN: DPN ITI</li> </ul>

### NUI Facility Format

Range:	ODPN, NDPN, 1992_DPN
Default:	ODPN
Description:	Specifies the NUI facility field format. <ul style="list-style-type: none"> <li>• ODPN: Old DPN format</li> <li>• NDPN: New DPN format</li> <li>• 1992_DPN: S1992 NUI format</li> </ul>

### NUI verification timer

Range:	5 to 180
Default:	60
Description:	Specifies the time (in seconds) that time waits before the call is cleared.

### Max NUI violations

Range:	0 to 10
Default:	3
Description:	The maximum number of successive NUI verification failures that can be tolerated when making verification attempts through a PAD port. <p><b>Note</b> Refer to the “Action Type for NUI violations” if the Max NUI Violations are reached.</p>

**Action Type for NUI violations**

Range:	NONE, DISC, DEGR, LOCK
Default:	NONE
Description:	<p>This specifies the action to be taken if the NUI violations exceed the configured threshold count.</p> <ul style="list-style-type: none"> <li>• NONE: No action is taken.</li> <li>• DISC: The port is disconnected.</li> <li>• DEGR: The port is busied-out for one minute and then is re-enabled.</li> <li>• LOCK: The port is disabled and operator intervention is required to enable the port.</li> </ul> <p><b>■ Note</b> This parameter is effective only when the parameter Port Control parameter is set to CNUI.</p>

**Inter-Character Time-out**

Range:	0 to 5
Default:	0
Description:	<p>Specifies the maximum time (in 50-millisecond increments) between characters in a frame. When set to zero (0) this parameter is disabled.</p> <p><b>■ Note</b> This parameter only appears when the parameter Terminal Control is set to HENNIS.</p>

## PAD Port Configuration for Autocalling

---

### Introduction

You must configure several parameters in the PAD port record for autocalling.

- Call Control (set to AUTO or AUTC)
- Autocall Mnemonic (this must be defined in the Mnemonic Table)
- Autocall Timeout (sec)
- Maximum Number of Autocall Attempts

---

### Initiating an AutoCall

An autocall is initiated in one of two ways.

- The terminal connects to the port (the parameters Call Control = AUTO and Connection Type is not SIMP). If the call attempt fails, the PAD initiates another call after a time specified in the parameter Autocall Timeout. The parameter Number of Autocall Tries specifies the number of times the PAD tries to make a connection. The PAD stops the process until the EIA input signals are lowered and then raised.
- A call is initiated when the terminal connects to the port and you press <CR> (Call Control = AUTC). If the call attempt fails, you must reenter <CR> to attempt another call.

---

### Mnemonic Addressing


You can configure an autocall port to automatically place a call at power up and have it routed with a mnemonic. This is useful when you are limited to a single host application and are always calling the same address.

Autocalling uses the Vanguard products mnemonic addressing function. Keep in kind the following when configuring for Autocalling:

- A Mnemonic Table entry must have a corresponding Route Selection Table entry.
- The port initiating the call must be configured for Autocalling (Port Record parameter Call Control is set to AUTO or AUTC).
  - AUTO specifies that the call is attempted when the EIA handshake is complete. When Connection Type = SIMP, autocalls are made on power up or port boot.
  - AUTC specifies that the call is attempted when the EIA handshake is complete and a <CR> is entered.

**SDLC Mnemonic Addressing**

Calls placed in a port configured for SDLC must use the mnemonic calling feature. Figure 5 shows the configuration process for calls on SDLC ports. Station 2, Port 4 in Node 100 is configured to call Station 3, Port 3 in Node 200.

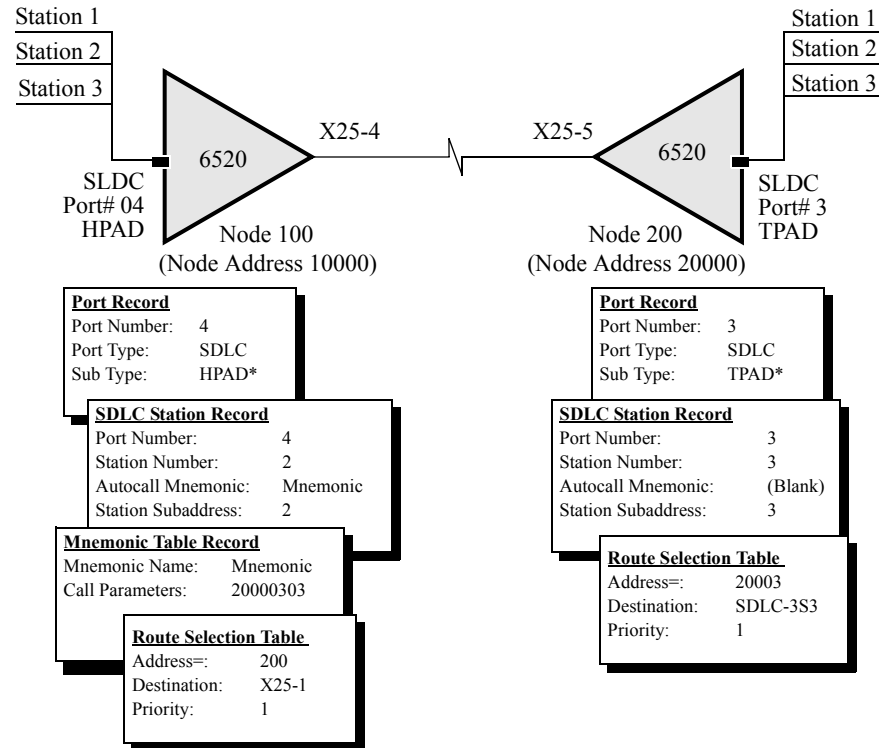

**Figure 5. SDLC Mnemonic Autocall Addressing**

**Note**

These configuration records and parameters pertain only to SDLC Mnemonic Autocall Addressing. There are also others that must be configured. For details about SDLC, refer to the *SDLC Option Manual* (Part No. T0101-05).

## PAD Port Configuration for Autospeed

### Introduction

Autospeed is a convenient way to configure a PAD port's speed, especially when you want a mix of terminal speeds. For example, autospeed is useful when the PAD port is connected to a modem that is called by different devices with different speeds.

### Implementing Autospeed

To implement autospeed, set the Port Record parameter Port Speed = AUTO. When the device calls the port, the port determines the speed of the device and programs its I/O drivers to match the device's speed.

### Auto Baud Sequence Parameter


A related parameter that effects Autospeed is the Auto Baud Sequence (in the PAD Port Record). This parameter specifies the Autospeed Recognition Character that the port uses to set the correct speed. These are the settings available with the Auto Baud Sequence parameter:

- CR\_Only: Autospeed on <CR> (default)
- CR\_DOT\_CR: Autospeed on <CR>.<CR>
- TYMNET: Autospeed on the letter "a" (must be lower case)
- TELENET: Autospeed on <CR><CR> for 1200 bps or lower and @ <CR> for 2400 bps or higher
- DOT\_DOT\_CR: autospeed on two or three dots followed by <CR>
- SP\_P\_CR: autospeed on "P<CR>"

The autobaud feature can support 14.4, 19.2, 28.8, and 38.4 kbps for all autospeed recognition characters. These speeds are not supported on the UIO or AIO cards.

### Autospeed Inter-Character Delay

Inter-Character Delay is the transmission time interval between characters. For example, Figure 6 shows the autospeed inter-character delay applied to the CR\_DOT\_CR sequence presented above.

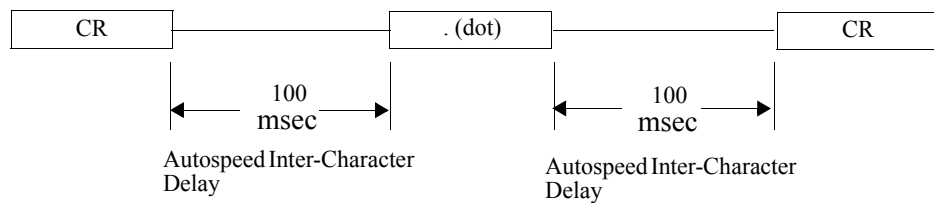

**Figure 6. Autospeed Inter-Character Delay**

### Reduced Autospeed Inter-Character Delay

When using a dial modem with a POS terminal or PC to send an Autobaud Sequence, problems may occur if the inter-character delay applied to that sequence is less than 180 msec. To overcome this, you must enter a CSK (5ERWXW2F76XHLTTUUC3) to reduce the inter-character processing time to 100 msec.

**■Note**

Reducing the autospeed inter-character delay also increases the minimum supported autospeed to 300 bps.

## PAD XON/OFF Support Using X.25 Interrupt Packets

### What is It?

There is a Customer Software Key (CSK) that enables the transmission of XON/XOFF asynchronous data characters across a Public Data Network (PDN) using X.25 Interrupt packets.


This improves the transmission of flow control information between local and remote PAD ports on Vanguard internetworking devices. Since X.25 Interrupt packets travel at a higher priority through the PDN, flow control information between PAD ports is communicated more thoroughly when you control the starting and stopping of the asynchronous data characters stream.

### How It Works

When a Vanguard PAD port receives an XON or XOFF flow control character from a user terminal or networking device, this feature sends the flow control characters across the PDN as X.25 Interrupt packets.

Consider the example shown in Figure 7. To stop User 2 from sending information, User 1 sends an XOFF character to the PAD port on the local Vanguard. Then the local Vanguard sends an X.25 Interrupt Packet to the remote node on the other side of the network, where the XOFF character is passed on to User 2. This stops User 2 from sending anymore data.

To let User 2 send information, User 1 sends an XON character into the PAD port on the local Vanguard, which sends an X.25 Interrupt Packet to the other node. The XON character is passed on to User 2. This allows User 2 to send data again.

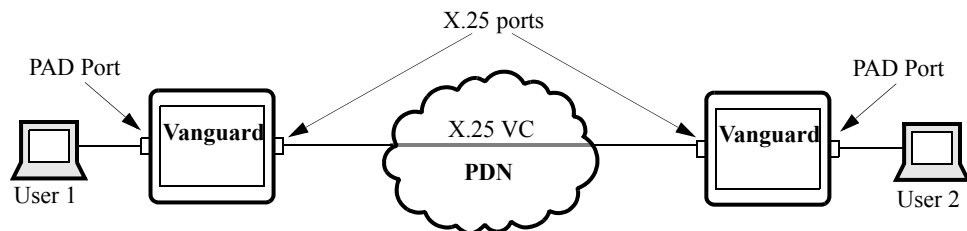

**Figure 7. Transmitting XON/OFF Frames with X.25 Interrupt Packets**

The User devices in Figure 7 can be networking devices or asynchronous terminals. For this feature to work, user devices at both ends of the network must be connected to Vanguard devices. In addition, set the PAD Profile record parameters Device Flow Control and PAD Data Restraint to 1 for both PAD ports.

**To enable this CSK** Complete these steps to enable the XON/XOFF CSK:

Step	Action
1	From the CTP Main menu, select Configure.
2	From the Configure menu, select Software Key Table.
3	Press <CR> (to access the Key Value field) and type the CSK number: <b>BGMV4HE3EGJCRFETYKH3</b>
4	To implement the feature, boot the node.

## PAD Prompt Table Record

### Introduction


You can change the PAD prompt which appears when a terminal connects to a Vanguard node and is in Command Mode. The default prompt is an asterisk (\*). You use the PAD Prompt Table to change the parameter.

**Note**

Before you can configure parameters, you must log on to the local node's control terminal port.

### What You See in This Record

Figure 8 shows how the PAD Prompt Table Record and its configuration parameters fit into the Vanguard products menu hierarchy.

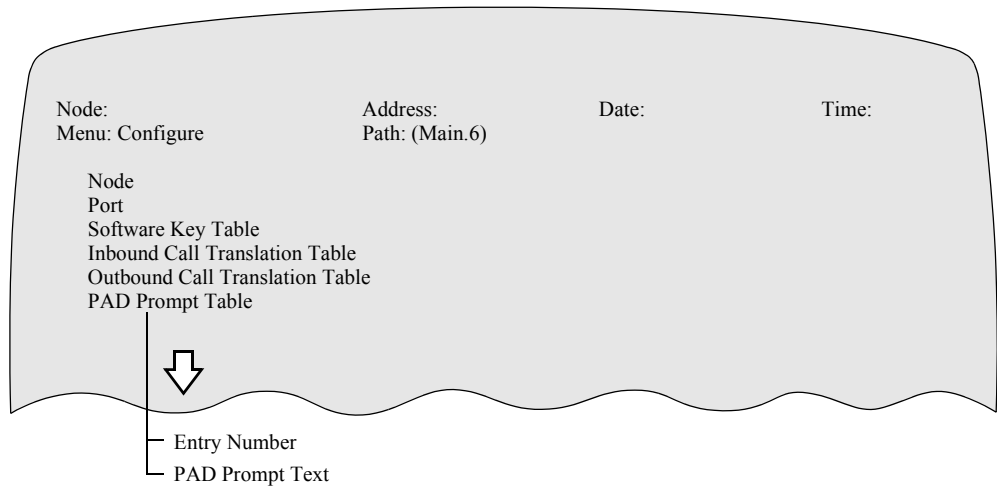

**Figure 8. PAD Prompt Table Record**

### Accessing the PAD Prompt Table Record

Follow these steps to access the PAD Prompt Table record:

Step	Action	Result
1	Select <b>Configure</b> from the CTP Main menu.	The Configure menu appears.
2	Select <b>PAD Prompt Table</b> from the Configure menu.	The PAD Prompt Table and its parameters appear. A prompt appears asking you to configure the next parameter.
3	Enter the parameter values.	
4	Press <b>&lt;ESC&gt;</b> to return to the Configure menu after you have configured all parameters.	



## PAD Prompt Table Record Parameters

### Introduction

This section describes the PAD Prompt Table parameters.

### Parameters

From the PAD Prompt Table Record, you can configure these parameters (with the exception of Entry Number):

#### Entry Number

Range:	1 to 8
Default:	1
Description:	Identifies the particular PAD Prompt Table entry being configured by the other parameter in the record. This parameter is not configurable.

#### PAD Prompt Text

Range:	0 to 1023 alphanumeric characters
Default:	N/A
Description:	<p>This text appears in place of the default PAD prompt asterisk (*). Enter the PAD prompt as a series of ASCII characters, terminated by a &lt;CR&gt;.</p> <p>Use these special characters to display information about the PAD Prompt text. If the character following the (%) symbol is not a special character, both the (%) and these character are discarded.</p> <ul style="list-style-type: none"> <li>• A: Node address</li> <li>• C: Channel number</li> <li>• G: Group subaddress</li> <li>• N: Node name</li> <li>• P: Port number</li> <li>• S: Subaddress</li> <li>• T: Time</li> <li>• V: Software revision</li> </ul> <p>Enter the caret (^) twice (it is discarded otherwise) as an escape character to tell the PAD to send control characters. The character following the caret is converted to a control character and is sent to the PAD port for output.</p>


## PAD Profile Table Record

### Introduction

The PAD Profile Table Record specifies the profile for a single PAD Port, in the local node. Many other PAD ports can also use the same PAD Profile Table Record to ensure that all PAD Ports have the same characteristics. You can configure up to 16 PAD profiles.

### What You See In This Record

Figure 9 shows how the PAD Profile Table Record and its configuration parameters fit into the Vanguard products menu hierarchy.

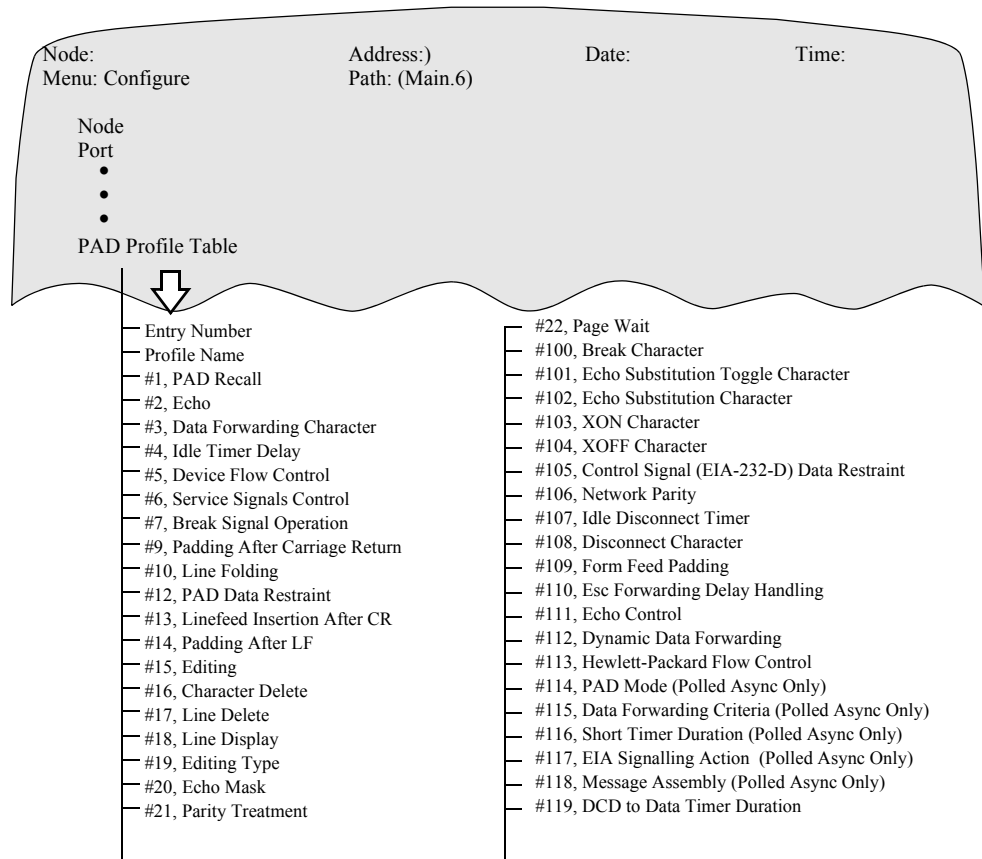

**Figure 9. PAD Profile Table Record**

### Before You Begin

Before you can configure parameters, you must log on to the local node's control terminal port. Refer to the *Vanguard Configuration Basics Manual* for CTP procedures.

**Configuration Guidelines**

When you configure the PAD Profile Table Record, use these guidelines:

- No blank Profile Names can exist.
- No duplicate Profile Names can exist.
- If parameter #113 is 1, then #1 must be 0.
- If parameter #114 is 0, then #115-#117 should also be 0.
- If parameter #115 is greater than 0, then #112 should be 0.
- Default profiles always exist in the device.

Refer to the tables of parameter values in the “Copying PAD Profile Tables into a Configuration” section later in this chapter.

**Accessing the PAD Profile Table Record**

Follow these steps to access the PAD Profile Table record:

<b>Step</b>	<b>Action</b>	<b>Result</b>
<b>1</b>	Select <b>Configure</b> , from the CTP Main menu.	The Configure menu appears.
<b>2</b>	Select <b>PAD Profile Table</b> from the Configure menu.	The PAD Profile Table and its parameters appear. A prompt appears asking you to configure the next parameter.
<b>3</b>	Enter the parameter values.	
<b>4</b>	Press <b>&lt;ESC&gt;</b> to return to the Configure menu after you have configured all parameters.	

## PAD Profile Table Record Parameters

### Introduction

This section describes the PAD Profile Record parameters.

### Parameters

From the PAD Profile Table Record, you can configure these parameters (with the exception of Entry Number):

#### Entry Number

Range:	1 to 16
Default:	1
Description:	Identifies the Pad Profile Table entry being configured by the other parameters in the record. This parameter is not configurable.

#### Profile Name

Range:	0 to 8 alphanumeric characters
Default:	0
Description:	Used by the parameter Profile Name in the PAD Port Record to select this particular PAD Profile Table Record entry. Use the space bar to blank the parameter value.

#### #1, PAD Recall

Range:	0, 1, 32 to 126
Default:	1
Description:	Identifies the character that can be entered during Data Mode to switch the terminal to Command Mode: <ul style="list-style-type: none"> <li>• 0: PAD recall disable</li> <li>• 1: PAD recall character (DLE or &lt;CNTRL&gt;P)</li> <li>• 32 to 126: Decimal value of ASCII character used for PAD recall</li> </ul>

#### #2, Echo

Range:	0, 1
Default:	1
Description:	Controls echo: <ul style="list-style-type: none"> <li>• 0: Echo disabled</li> <li>• 1: Echo enabled</li> </ul> When set to 0 (zero), parameter #20 Echo Mask is ignored.

**#3, Data Forwarding Character**

Range:	0 to 127
Default:	2
Description:	<p>Specifies the ASCII characters used for data forwarding:</p> <ul style="list-style-type: none"> <li>• 0: No data forwarding characters.</li> <li>• 1: A-Z, a-z, 0-9.</li> <li>• 2: &lt;CR&gt;.</li> <li>• 4: &lt;ESC&gt;, &lt;BEL&gt;, &lt;ENQ&gt;, &lt;ACK&gt;.</li> <li>• 8: &lt;DEL&gt;, &lt;CAN&gt;, &lt;DC2&gt;.</li> <li>• 16: &lt;EOT&gt;, &lt;ETX&gt;.</li> <li>• 32: &lt;HT&gt;, &lt;LF&gt;, &lt;VT&gt;, &lt;FF&gt;.</li> <li>• 64: All characters in columns 0 and 1 of Appendix A, ASCII Table, not mentioned above.</li> </ul> <p><b>■ Note</b> Combine several parameter values by summing: <u>Example</u>: 6 = 2 (&lt;CR&gt;) + 4 (&lt;ESC&gt;, &lt;BEL&gt;, &lt;ENQ&gt;, and &lt;ACK&gt;. This includes all of selection 2 and selection 4.</p>

**#4, Idle Timer Delay**

Range:	0 to 255
Default:	0
Description:	<p>Selects forwarding idle timer delay (in increments of 1/20 second) that determines when data is sent to the network.</p> <ul style="list-style-type: none"> <li>• 1 to 255: Timer delay.</li> <li>• 0: disables parameter</li> </ul> <p><b>■ Note</b> Functional only if parameter #15, Editing, is set to 0.</p>

### #5, Device Flow Control

Range:	0 to 2
Default:	0
Description:	<p>Specifies if and how the PAD port sending the XON/XOFF characters restrains the attached terminal from sending data.</p> <ul style="list-style-type: none"> <li>• 0: No control with XON/XOFF.</li> <li>• 1: Control inbound data from device.</li> <li>• 2: Control inbound data and PAD commands from device.</li> </ul> <p>For DRI control using V.24 connector control signals (CTS), set this parameter to 0 and use parameter #105, Control Signal (EIA-232-D) Data Restraint.</p> <p><b>■ Note</b> Called Data Restraint Inbound (DRI) when using inland control.</p>

### #6, Service Signals Control

Range:	0, 1, 4, 5, 9, 12, 13
Default:	5
Description:	<p>Controls PAD service signal messages sent to the attached device:</p> <ul style="list-style-type: none"> <li>• 0: No service signals sent.</li> <li>• 1: Service signals, other than the prompt, sent.</li> <li>• 4: Prompt service signal sent.</li> <li>• 5: All service signals sent.</li> <li>• 9: Extended format service signals, other than prompt, sent.</li> <li>• 12: Extended format prompt service signal sent.</li> <li>• 13: All service signals sent in extended format.</li> </ul>

### #7, Break Signal Operation

Range:	0, 1, 2, 4, 5, 8, 21
Default:	2
Description:	<p>Selects the PAD mode of operation when a break signal from the attached device is received:</p> <ul style="list-style-type: none"> <li>• 0: Do nothing.</li> <li>• 1: Send Interrupt packet.</li> <li>• 2: Send Reset packet</li> <li>• 4: Send Indication of Break packet.</li> <li>• 5: Send Interrupt packet and Indication of Break packet.</li> <li>• 8: Escape from data transfer state; return to Command Mode.</li> <li>• 21: Discard output; send Interrupt packet and Indication of Break packet.</li> </ul>

**#9, Padding After Carriage Return**

Range:	0 to 255
Default:	0
Description:	<p>Controls padding after &lt;CR&gt;:</p> <ul style="list-style-type: none"> <li>• 0: No padding after &lt;CR&gt;. Use this when sending to a CRT.</li> <li>• 1 to 255: The number of padding characters inserted after &lt;CR&gt;</li> </ul> <p>Select at least one padding character. When the data is sent to a printer, the padding characters interrupt the data stream until the print head is ready for the next line of text.</p>

**#10, Line Folding**

Range:	0 to 255
Default:	0
Description:	<p>Controls line folding:</p> <ul style="list-style-type: none"> <li>• 0: No line folding</li> <li>• 1 to 255: Number of characters per line</li> </ul>

**#12, PAD Data Restraint**

Range:	0, 1
Default:	1
Description:	<p>Specifies if and how the XON/XOFF characters sent from the attached terminal restrain the PAD from sending data:</p> <ul style="list-style-type: none"> <li>• 0: No flow control with XON/XOFF</li> <li>• 1: Allow flow control on outbound data and service signals</li> </ul> <p>For DRO control using V.24 connector control signals (pin 14):</p> <ul style="list-style-type: none"> <li>• Set this parameter to 0.</li> <li>• Use parameter #105, Control Signal (EIA-232-D) Data Restraint.</li> <li>• Called Data Restraint Outbound (DRO) when using inband control.</li> </ul>

**#13, Line Feed Insertion after CR**

Range:	0 to 7
Default:	4
Description:	<p>Determines if and how a line feed character is inserted into the data during Data Mode:</p> <ul style="list-style-type: none"> <li>• 0: Line feed is not inserted.</li> <li>• 1: Line feed is inserted after &lt;CR&gt; in data sent to device.</li> <li>• 2: Line feed is inserted after &lt;CR&gt; in data from attached device.</li> <li>• 4: Line feed is inserted after echo of &lt;CR&gt; to attached device.</li> <li>• X: Any combination of the above, for example, to combine 1 and 2, enter 3.</li> </ul>

**#14, Padding after LF**

Range:	0 to 255
Default:	0
Description:	<p>Controls padding after &lt;LF&gt; in Data Mode:</p> <ul style="list-style-type: none"> <li>• 0: No padding after &lt;LF&gt;</li> <li>• 1 to 255: The number of padding characters inserted after &lt;LF&gt;</li> </ul> <p>Select at least one padding character when a printer receives data, as the padding characters interrupt the data stream until the print head is ready for the next line of text.</p>

**#15, Editing**

Range:	0, 1
Default:	1
Description:	<ul style="list-style-type: none"> <li>• 0: No editing</li> <li>• 1: Allow editing</li> </ul> <p><b>■ Note</b> If set to 1, parameter #4, Idle Timer Delay must be 0. If set to 0, parameters #16 Character Delete, #17 Line Delete, and #18 Line Display are disabled.</p>



**#16, Character Delete**

Range:	0 to 127
Default:	8 (backspace or <CNTRL>H)
Description:	Specifies the decimal value of the ASCII character used to delete a character when #15 Editing = 1.

**#17, Line Delete**

Range:	0 to 127
Default:	24 (<CNTRL>X)
Description:	Specifies the decimal value of the ASCII character used to delete a line (when #15 Editing = 1)

**#18, Line Display**

Range:	0 to 127
Default:	18 (<CNTRL>R)
Description:	Specifies the decimal value of the ASCII character used to display a line (when #15 Editing = 1).

**#19, Editing Type**

Range:	0, 1, 2, 5, 32 to 126
Default:	2
Description:	<p>Specifies the type of character delete service signals the PAD sends:</p> <ul style="list-style-type: none"> <li>• 0: No service signals</li> <li>• 1: Printing terminals (PAD sends backslash (\) for each delete character received from terminal)</li> <li>• 2: Display terminals (PAD sends &lt;BS&gt;&lt;SP&gt;&lt;BS&gt; for each delete character received from terminal)</li> <li>• 8 or 32 to 126: Specifies decimal value of ASCII character used as the editing service signal</li> </ul>

**#20, Echo Mask**

Range:	0 to 255
Default:	1+2+4+8+16+32+64+128
Description:	<p>Specifies the echo mask (which characters are not echoed):</p> <ul style="list-style-type: none"> <li>• 0: No echo mask (all characters echoed).</li> <li>• 1: No echo of &lt;CR&gt;.</li> <li>• 2: No echo of line feed &lt;LF&gt;.</li> <li>• 4: No echo of &lt;VT&gt;, &lt;HT&gt;, or &lt;FF&gt;.</li> <li>• 8: No echo of &lt;BEL&gt; or &lt;BS&gt;.</li> <li>• 16: No echo of &lt;ESC&gt; or &lt;ENQ&gt;.</li> <li>• 32: No echo of &lt;ACK&gt;, &lt;NAK&gt;, &lt;STX&gt;, &lt;SOH&gt;, &lt;EOT&gt;, &lt;ETB&gt;, or &lt;ETX&gt;.</li> <li>• 64: No echo of editing characters as designated by parameters #16, #17, and #18.</li> <li>• 128: No echo of all characters in columns 0 and 1 of the ASCII table not mentioned above, and &lt;DEL&gt;.</li> </ul> <p><b>■ Note</b>  Combine several parameter values by summing:  <u>Example:</u> 3 = 2 (no echo of line feed) + 1 (No echo of &lt;CR&gt;).  If parameter #2 Echo = 0 (disabled), parameter #20 Echo Mask is ignored.</p>

**#21 Parity Treatment**

Range:	0 to 7
Default:	7
Description:	<p>Specifies how parity is treated on characters to and from the attached device:</p> <ul style="list-style-type: none"> <li>• 0: No parity checking or generation</li> <li>• 1: Parity checked in received characters</li> <li>• 2: Parity generated in transmitted characters</li> <li>• 4: Parity stripped from received characters</li> </ul> <p><b>■ Note</b>  Combine several parameter values by summing:  – <u>Example:</u> 3 = 2 (parity generated in transmitted character) + 1 (parity checked on received characters)</p>

**#22, Page Wait**

Range:	0 to 255
Default:	0
Description:	Controls page wait: <ul style="list-style-type: none"> <li>• 0: Page wait disabled</li> <li>• 1 to 255: Number of &lt;LF&gt; characters sent by PAD for page wait.</li> </ul>

**#100, Break Character**

Range:	0 to 127
Default:	0
Description:	Specifies the ASCII character used to simulate a break for terminals that do not have a break key: <ul style="list-style-type: none"> <li>• 0: No break character defined</li> <li>• 1 to 127: Decimal value of ASCII character used to simulate a break</li> </ul>

**#101, Echo Substitution Toggle Character**

Range:	0 to 127
Default:	0
Description:	Specifies the ASCII character used to toggle echo substitution of entered data (when #2, Echo = 1): <ul style="list-style-type: none"> <li>• 0: No echo substitution</li> <li>• 1 to 127: Decimal value of ASCII character used to toggle echo substitution</li> </ul>

**#102, Echo Substitution Character**

Range:	0 to 127
Default:	0
Description:	Specifies the decimal value of the ASCII character used to echo all characters entered by the attached device (when #2 Echo = 1 and #101 Echo Substitution Toggle Character is enabled): <ul style="list-style-type: none"> <li>• 0: No echo when echo substitution toggled on</li> <li>• 1 to 127: Decimal value of ASCII character used as echo</li> </ul> <p><b>■ Note</b> This is useful when you enter a password and do not want the characters to appear on the screen.</p>

**#103, XON Character**

Range:	0 to 255
Default:	17
Description:	Specifies the decimal value of the ASCII character used for the XON function.

**#104, XOFF Character**

Range:	0 to 255
Default:	19
Description:	Specifies the decimal value of the ASCII character used for the XOFF function.

**#105, Control Signal (EIA-232-D) Data Restraint**

Range:	0 to 3
Default:	0
Description:	<p>Determines how V.24 control signals (instead of XOFF/XON) flow control the PAD and attached terminal.</p> <p>Called Out-of-Band flow control; this process applies to data, commands, and responses to and from the attached device:</p> <ul style="list-style-type: none"> <li>• 0: Disabled.</li> <li>• 1: Data Restraint Outbound (DRO): attached device flow controls PAD with pin 14 (requires parameter #12 PAD Data Restraint = 0).</li> <li>• 2: Data Restraint Inbound (DRI): PAD flow controls attached device with connector pin 5, CTS (requires parameter #5 Device Flow Control = 0).</li> <li>• 3: Combination of 1 and 2.</li> </ul>

**#106, Network Parity**

Range:	0 to 4
Default	0
Description:	<p>Specifies the parity of data the PAD sends to the network:</p> <ul style="list-style-type: none"> <li>• 0: Transparent</li> <li>• 1: Space</li> <li>• 2: Mark</li> <li>• 3: Even</li> <li>• 4: Odd</li> </ul> <p><b>■ Note</b> For most applications, select zero (0), which allows data to pass through the PAD with the least processing and highest throughput.</p>

**#107, Idle Disconnect Timer**

Range:	0 to 255
Default:	0
Description:	<p>Specifies the time (in minutes) when there is no user data before a call is cleared if there is no user data during a specific number of minutes:</p> <ul style="list-style-type: none"> <li>• 0: Disabled.</li> <li>• 1 to 255: Time in minutes.</li> </ul>

**#108, Disconnect Character**

Range:	0 to 127
Default:	0
Description:	<p>Specifies the decimal value of the ASCII character used to disconnect a call:</p> <p>To disable this parameter, set to zero (0).</p>

**#109, Form Feed Padding**

Range:	0 to 255
Default:	0
Description:	<p>Specifies the number of padding characters inserted in the data sent to the attached device after a form-feed &lt;FF&gt;:</p> <p>To disable this parameter, set to zero (0).</p>

### #110, Esc Forwarding Delay Handling

Range:	0 to 255
Default:	0
Description:	<p>Specifies the delay (in 1/20th second increments) after the &lt;ESC&gt; sequence is detected. This delay ensures that all characters involved in an ESC sequence reach an X.25 host in the same packet.</p> <ul style="list-style-type: none"> <li>• Select a value that is greater than the time it takes the terminal to send the &lt;ESC&gt; sequence, yet small enough so the &lt;ESC&gt; sequence is sent as soon as possible.</li> <li>• Refer to your terminal manual to determine the length of the longest sequence.</li> <li>• When this parameter is set, the escape sequence is sent as a single packet to allow the host to recognize it in the normal manner.</li> </ul> <p>To disable this parameter set to zero (0).</p>

### #111, Echo Control

Range:	0 to 3
Default:	0
Description:	<p>Specifies how the PAD handles echoing of data when #2 Echo = 1:</p> <ul style="list-style-type: none"> <li>• 0: No Priority. Data is output, and characters are echoed as they arrive.</li> <li>• 1: Input Priority. PAD holds output until input from the terminal is finished.</li> <li>• 2: Output Priority. PAD echoes input after output.</li> <li>• 3: Formatted Screen. PAD echoes one block of data for each packet sent from the host and assumes that the packet reformats the screen or moves the cursor to the next field.</li> </ul> <p>■ <b>Note</b> Disabled when #2 Echo = 0</p>

### #112, Dynamic Data Forwarding

Range:	0, 1
Default:	0
Description:	<p>Determines if the PAD dynamically forwards data packets as bandwidth becomes available on the network link:</p> <ul style="list-style-type: none"> <li>• 0: Dynamic Data Forwarding OFF</li> <li>• 1: Dynamic Data Forwarding ON</li> </ul> <p><b>■ Note</b> When enabled, parameters 1, 2, 3, 4, 7, 15, 16, 17, 18, 20, 100, 101, 102, 106, 108, 110, 111, and 113 are ignored.</p>

### #113, Hewlett-Packard Flow Control

Range:	0 to 4
Default:	0
Description:	<p>Controls Hewlett-Packard Flow Control:</p> <ul style="list-style-type: none"> <li>• 0: No HP flow control</li> <li>• 1: HP host ENQ/ack control</li> <li>• 2: HP terminal ENQ/ack control</li> <li>• 3: HP host XON/XOFF control</li> <li>• 4: HP terminal XON/XOFF control</li> </ul>

### #114, PAD Mode

Range:	0, 1, 2
Default:	0
Description:	<p>Selects the PAD operational mode:</p> <ul style="list-style-type: none"> <li>• 0: Normal operation</li> <li>• 1: Polled Async host PAD</li> <li>• 2: Polled Async remote PAD</li> </ul> <p><b>■ Note</b> A change to this parameter only takes effect if you purchased the Transparent Polled Async option for this node.</p>

### #115, Data Forwarding Criteria

Range:	0 to 2
Default:	0
Description:	<p>Specifies the Data Forwarding criteria:</p> <ul style="list-style-type: none"> <li>• 0: Normal</li> <li>• 1: Short timer</li> <li>• 2: Drop in RTS signal</li> </ul> <p><b>■ Note</b> A change to this parameter only takes effect if you purchased the Transparent Polled Async option for this node.</p>

### #116, Short Timer Duration

Range:	0 to 255
Default:	0
Description:	<p>Specifies (in milliseconds) the Short Timer duration (when #115, Data Forwarding Criteria = 1). Zero (0) disables this parameter.</p> <p><b>■ Note</b> A change to this parameter only takes effect if you purchased the Transparent Polled Async option for this node.</p>

### #117, EIA Signalling Action

Range:	0, 1
Default:	0
Description:	<p>Specifies the EIA signalling action (when #114, PAD Mode = 1 or 2).</p> <ul style="list-style-type: none"> <li>• 0: None</li> <li>• 1: Raise DCD before and after transmission.</li> </ul> <p><b>■ Note</b> A change to this parameter only takes effect if you purchased the Transparent Polled Async option for this node.</p>



**#118, Message Assembly**

Range:	0, 1
Default:	0
Description:	<p>Allows the PAD to collect async messages from the network before sending to the attached device:</p> <ul style="list-style-type: none"> <li>• 0: Disabled</li> <li>• 1: Enabled</li> </ul> <p><b>■ Note</b> A change to this parameter only takes effect if you purchased the Transparent Polled Async option for this node.</p>

**#119, DCD to Data Timer Duration**

Range:	0 to 255
Default:	0
Description:	<p>Specifies the time, in milliseconds, that DCD is held high before data transmission to the attached device (when #117, EIA Signalling Action = 1). Zero (0) disables this parameter.</p> <p><b>■ Note</b> A change to this parameter only takes effect if you purchased the Transparent Polled Async option for this node.</p>

## Copying PAD Profile Tables into a Configuration

### Introduction

Each node processor card contains 14 PAD Profiles stored in memory.

By using the parameter values in the stored PAD Profile Table, you can copy them into the configuration memory as if you had entered the parameter values one parameter at a time.

The PAD accepts identifiers from 0 to 99. The profiles from 0 to 12, 90, and 91 are listed in this section. All the remaining profiles (0, 14-89, and 92-99) are DEFAULT as existing now.

### PAD Profile Table Size

The Size of the PAD Profile Table has increased to 100 so that Entry Number 1 under PAD Profile Table configuration corresponds to Profile Identifier 0, Entry Number 2 to Profile Identifier 1, and so on. Entry Number 100 corresponds to Profile Identifier 99.

#### ■Note

You cannot enter 0 as an Entry Number.

### Copying a PAD Profile Table

Follow these steps to copy any of these PAD Profile Tables into your configuration:

<b>Step</b>	<b>Action</b>	<b>Result</b>
<b>1</b>	Select <b>Copy/Insert Record -&gt; Copy Special PAD Profile from PROM</b> from the CTP Main menu.	This prompt appears: <b>From Entry Number: 1/</b>  Select the PAD Profile Table you want to copy into your configuration.
<b>2</b>	Type the entry number followed by <b>&lt;CR&gt;</b> .	You are then prompted for the next Entry Number (or just press <b>&lt;CR&gt;</b> ). This allows you to configure more than one entry with the same stored PAD Profile Table.  The parameter values in the stored PAD Profile Table are copied into the configuration memory (as if you had entered the parameter values one parameter at a time).
<b>3</b>	Press <b>&lt;ESC&gt;</b> once you are finished.	The Copy/Insert Record menu reappears.

**Parameter Values** The parameter values for the 14 PAD Profiles are listed in these tables. For example, if you enter 0, you get all the values listed in the Default column.

**Parameter Values Stored In Memory (0 to 5)**

<b>Parameter Name</b>	<b>Default (0)</b>	<b>Test (1)</b>	<b>Simple (2)</b>	<b>Transpar (3)</b>	<b>CRT (4)</b>	<b>Printer (5)</b>
#1 PAD Recall	1	1	1	0	1	1
#2 Echo	1	1	1	0	1	1
#3 Data Forwarding Character	2	2	126	0	2	2
#4 Idle Timer Delay	0	0	0	20	0	0
#5 Device Flow Control	0	1	1	0	0	2
#6 Service Signals Control	5	5	1	0	5	5
#7 Break Signal Operation	2	21	2	2	2	21
#8 Discard Output	n/a	n/a	n/a	n/a	n/a	n/a
#9 Padding After CR	0	0	0	0	0	5
#10 Line Folding	0	0	0	0	0	80
#11 Speed	n/a	n/a	n/a	n/a	n/a	n/a
#12 PAD Data Restraint	1	1	1	0	1	1
#13 LF Insertion After CR	4	4	0	0	4	4
#14 Padding After LF	0	0	0	0	0	5
#15 Editing	1	1	0	0	1	1
#16 Character Delete	8	8	8	8	8	8
#17 Line Delete	24	24	24	24	24	24
#18 Line Display	18	18	18	18	18	18
#19 Editing Type	2	1	1	1	2	1
#20 Echo Mask	255	0	0	0	255	255
#21 Parity Treatment	7	7	7	7	7	7
#22 Page Wait	0	0	0	0	0	0
#100 Break Character	0	0	0	0	0	0
#101 Echo Sub Toggle Character	0	0	0	0	0	0
#102 Echo Sub Character	0	0	0	0	0	0
#103 XON Character	17	17	17	17	17	17
#104 XOFF Character	19	19	19	19	19	19
#105 Data Restraint	0	0	0	0	0	0
#106 Network Parity	0	0	0	0	0	0
#107 Idle Disconnect Timer	0	0	0	0	0	0
#108 Disconnect Character	0	0	0	0	0	0
#109 Form Feed Padding	0	40	40	0	0	40
#110 ESC Forwarding Delay	0	0	0	0	0	0

**Parameter Values Stored In Memory (0 to 5) (continued)**

<b>Parameter Name</b>	<b>Default (0)</b>	<b>Test (1)</b>	<b>Simple (2)</b>	<b>Transpar (3)</b>	<b>CRT (4)</b>	<b>Printer (5)</b>
#111 Echo Control	0	0	0	0	0	0
#112 Dynamic Data Forwarding	0	0	0	0	0	0
#113 Hewlett-Packard Flow Control	0	0	0	0	0	0
#114 PAD Mode	0	0	0	0	0	0
#115 Data Forwarding Criteria	0	0	0	0	0	0
#116 Short Timer Duration	0	0	0	0	0	0
#117 EIA Signalling Action	0	0	0	0	0	0
#118 Message Assembly	1	1	1	1	1	1
#119 DCD to Data Timer Duration	0	0	0	0	0	0

**Parameter Values Stored in Memory (6 to 11)**

<b>Parameter Name</b>	<b>DH HPĒA (6)</b>	<b>DT HPĒA (7)</b>	<b>DH HPXŌN (8)</b>	<b>DT HPXŌN (9)</b>	<b>TPA HOST (10)</b>	<b>TPA RMŌT (11)</b>
#1 PAD Recall	0	0	0	0	0	0
#2 Echo	0	0	0	0	0	0
#3 Data Forwarding Character	0	2	2	2	0	0
#4 Idle Timer Delay	0	0	0	0	1	1
#5 Device Flow Control	0	2	0	0	0	0
#6 Service Signals Control	0	0	0	0	0	0
#7 Break Signal Operation	0	0	0	0	2	2
#8 Discard Output	n/a	n/a	n/a	n/a	n/a	n/a
#9 Padding After CR	0	0	0	0	0	0
#10 Line Folding	0	0	0	0	0	0
#11 Speed	n/a	n/a	n/a	n/a	n/a	n/a
#12 PAD Data Restraint	0	1	0	0	0	0
#13 LF Insertion After CR	0	0	0	0	0	0
#14 Padding After LF	0	0	0	0	0	0
#15 Editing	0	0	0	0	0	0
#16 Character Delete	8	8	8	8	8	8
#17 Line Delete	24	24	24	24	24	24
#18 Line Display	18	18	18	18	18	18
#19 Editing Type	2	2	2	2	1	1
#20 Echo Mask	255	255	255	255	0	0

## Parameter Values Stored in Memory (6 to 11) (continued)

<b>Parameter Name</b>	<b>DH_ HPĒA (6)</b>	<b>DT_ HPĒA (7)</b>	<b>DH_ HPX̄ON (8)</b>	<b>DT_ HPX̄ON (9)</b>	<b>TPA_ HOST (10)</b>	<b>TPA_ RMOT (11)</b>
#21 Parity Treatment	7	7	7	7	7	7
#22 Page Wait	0	0	0	0	0	0
#100 Break Character	0	0	0	0	0	0
#101 Echo Sub Toggle Character	0	0	0	0	0	0
#102 Echo Sub Character	0	0	0	0	0	0
#103 XON Character	17	17	17	17	17	17
#104 XOFF Character	19	19	19	19	19	19
#105 Data Restraint	0	0	0	0	0	0
#106 Network Parity	0	0	0	0	0	0
#107 Idle Disconnect Timer	0	0	0	0	0	0
#108 Disconnect Character	0	0	0	0	0	0
#109 Form Feed Padding	0	0	0	0	0	0
#110 ESC Forwarding Delay	0	0	0	0	0	0
#111 Echo Control	0	0	0	0	0	0
#112 Dynamic Data Forwarding	0	0	0	0	0	0
#113 Hewlett-Packard Flow Control	1	2	3	4	0	0
#114 PAD Mode	0	0	0	0	1	2
#115 Data Forwarding Criteria	0	0	0	0	0	0
#116 Short Timer Duration	0	0	0	0	10	10
#117 EIA Signalling Action	0	0	0	0	1	0
#118 Message Assembly	1	1	1	1	1	1
#119 DCD to Data Timer Duration	0	0	0	0	0	0

**Values for Profiles 90 and 91**

The parameter values for the International Simple (INT1984) and International Transparent (TRANSP1) profiles 91 and 92 are listed in this table.

**Parameter Values Stored in Memory**

	<i>Parameter</i>	<i>INT1984 (91)</i>	<i>TRANSP1 (92)</i>
1	Pad recall using a character	1	0
2	Echo	1	0
3	Data forwarding character	126	0
4	Idle timer delay	0	20
5	Ancillary device control	1	0
6	Control of PAD service signals	1	0
7	Break operating mode	2	2
8	Discard output	0	0
9	CR padding	0	0
10	Line folding	0	0
11	Baud rate	14	14
12	Flow control of the PAD	1	0
13	Linefeed insertion after CR	0	0
14	Padding after linefeed	0	0
15	Editing	0	0
16	Character delete	127	127
17	Line delete	24	24
18	Line display	18	18
19	Editing PAD service signal	1	1
20	Echo mask	0	0
21	Parity treatment	0	0
22	Page wait	0	0

**■ Note**

The values for all remaining parameters are zero.

**PAD Bulletin Message**

The PAD Bulletin Message is displayed when you connect to a PAD, and the Profile Parameter 6 (service signals control) is set to 5.


## Remote PAD Parameter Table Record

### Introduction

This record contains parameters that define a specified remote PAD. When a call is made to a port that uses this table entry, an X.29 set command is sent.

### What You See In This Record

Figure 10 shows how the Remote PAD Parameter Table Record and its configuration parameters fit into the Vanguard products menu hierarchy.

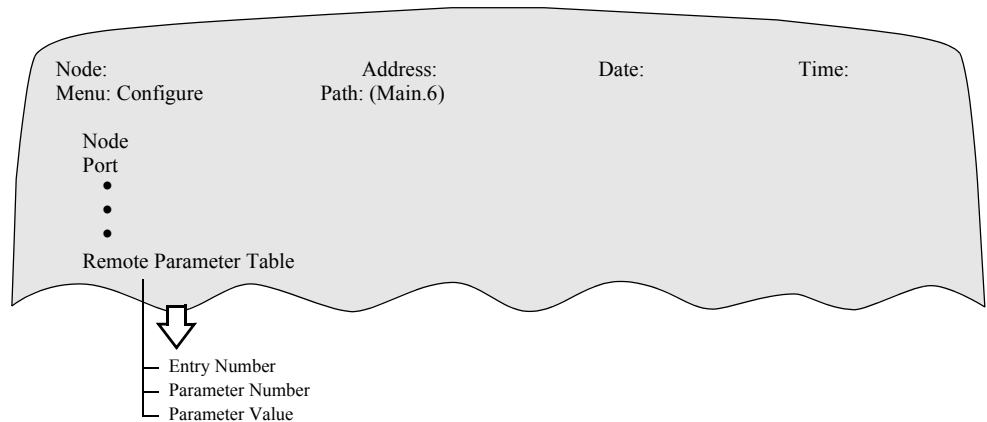

**Figure 10. Remote PAD Parameter Table Record**

### Before You Begin

Before you can configure parameters, you must log on to the local node's control terminal port. Refer to the *Vanguard Configuration Basics Manual* for CTP procedures.

### Configuration Guidelines

When you configure the Remote PAD Parameter Table Record, do not use duplicate Parameter Numbers.

### Accessing the Remote PAD Parameter Table Record

Follow these steps to access the Remote PAD Parameter Table record:

Step	Action	Result
1	Select <b>Configure</b> from the CTP Main menu.	The Configure menu appears.
2	Select <b>Remote PAD Parameter Table</b> from the Configure menu.	The Remote PAD Parameter Table and its parameters appear. A prompt appears asking you to configure the next parameter.
3	Enter the parameter values.	
4	Press <b>&lt;ESC&gt;</b> to return to the Configure menu after you have configured all parameters.	

## Remote PAD Parameter Table Record Parameters

### Introduction

This section describes the Remote PAD Parameter Record parameters.

### Parameters

You can configure these parameters (with the exception of Entry Number) from the Remote PAD Parameter Table Record:

#### Entry Number

Range:	1 to 6
Default:	1
Description:	Identifies the PAD Parameter Table entry being configured by the other parameters in the record.  <b>■ Note</b> Not configurable. Parameter Remote PAD Parameter Number in the PAD Port Record references this value.

#### #1 Parameter Number

Range:	0 to 127
Default:	0
Description:	Specifies the X.3 parameter sent to a remote PAD that has just connected to a local PAD port. The selections correspond to the parameters in the PAD Profile Table: <ul style="list-style-type: none"> <li>• #1: PAD Recall character (0, 1,32 to 126)</li> <li>• #2: Echo (0, 1)</li> <li>• #3: Data Forwarding Character (0, 1 to 127)</li> <li>• #4: Idle Timer Delay (0, 1 to 255)</li> <li>• #5: Device Flow Control (0, 1, 2)</li> <li>• #6: Service Signals Control (0, 1, 4, 7 to 15)</li> <li>• #7: Break Signal Operation (0, 1, 4, 8, 16)</li> <li>• #8: Discard output (0, 1) (not supported by the 6500<sup>PLUS</sup>)</li> <li>• #9: Padding after Carriage Return (0 to 255)</li> <li>• #10: Line Folding (0, 1 to 255)</li> <li>• #11: Speed (0-18) (not supported by the 6500<sup>PLUS</sup>)</li> <li>• #12: PAD Data Restraint (0,1)</li> <li>• #13: Line Feed Insertion after CR (0, 1, 2, 4)</li> <li>• #14: Padding after LF (0 to 255)</li> <li>• #15: Editing (0, 1)</li> <li>• #16: Character Delete (0 to 127)</li> <li>• #17: Line Delete (0 to 127)</li> </ul>



## #1 Parameter Number (continued)

Description: (Continued)	<ul style="list-style-type: none"> <li>• #18: Line Display (0 to 127)</li> <li>• #19: Editing Type (0, 1, 2, 8, 32 to 126)</li> <li>• #20: Echo Mask (0 to 255)</li> <li>• #21: Parity Treatment (0 to 7) (normally not used)</li> <li>• #22: Page Wait (0, 1 to 255)</li> <li>• #100: Break Character (0 to 127)</li> <li>• #101: Echo Substitution Toggle Character (0 to 127)</li> <li>• #102: Echo Substitution Character (0 to 127)</li> <li>• #103: XON Character (0 to 255)</li> <li>• #104: XOFF Character (0 to 255)</li> <li>• #105: Control Signal (EIA-232-D) Data Restraint (0 to 3)</li> <li>• #106: Network Parity (0 to 4)</li> <li>• #107: Idle Disconnect Timer (0 to 255)</li> <li>• #108: Disconnect Character (0 to 127)</li> <li>• #109: Form Feed Padding (0 to 255)</li> <li>• #110: Esc Forwarding Delay Handling (0 to 255)</li> <li>• #111: Echo Control (0 to 3)</li> <li>• #112: Dynamic Data Forwarding (0, 1)</li> <li>• #113: Hewlett-Packard flow control (0 to 4)</li> <li>• #114: PAD Mode (0 to 2)</li> <li>• #115: Data Forwarding Criteria (0 to 2)</li> <li>• #116: Short Timer Duration (0 to 255)</li> <li>• #117: EIA Signalling Action (0, 1)</li> <li>• #118: Message Assembly (0, 1)</li> <li>• #119: DCD to Data Timer Duration (0 to 255)</li> </ul> <p>If you enter 0 (zero), the entry is ignored.</p>
-----------------------------	---

**#1 Parameter Value**

Range:	0 to 255
Default:	0
Description:	<p>Specifies the X.3 parameter value (in the PAD Profile Table) sent to the remote PAD when connection is made.</p> <p>Entering an incorrect value for a particular parameter causes the value to be ignored.</p> <p><b>Example:</b></p> <p><u>Step 1:</u> Set the Parameter Value (or press &lt;CR&gt;).</p> <p><u>Result:</u> The next Parameter Number appears, followed by the next Parameter Value.</p> <p><u>Step 2:</u> Set a parameter value for #1 Parameter Number and #1 Parameter Value.</p> <p><u>Result:</u> #2 Parameter Number and then #2 Parameter Value appear.</p> <p>The sequence repeats until you enter one of these occur:</p> <ul style="list-style-type: none"><li>• A Parameter Number and Parameter Value for each parameter listed in the PAD profile table</li><li>• &lt;;&gt; to implement the values</li></ul> <p>&lt;ESC&gt; to abort the process</p>


## Detailed PAD Port Statistics

### Function

When you select Detailed PAD Port Statistics, a series of screens appears that provides information about the state and status of a PAD port.

### What You See in the First Screen

Figure 11 shows the first screen of the Detailed PAD Port Statistics.

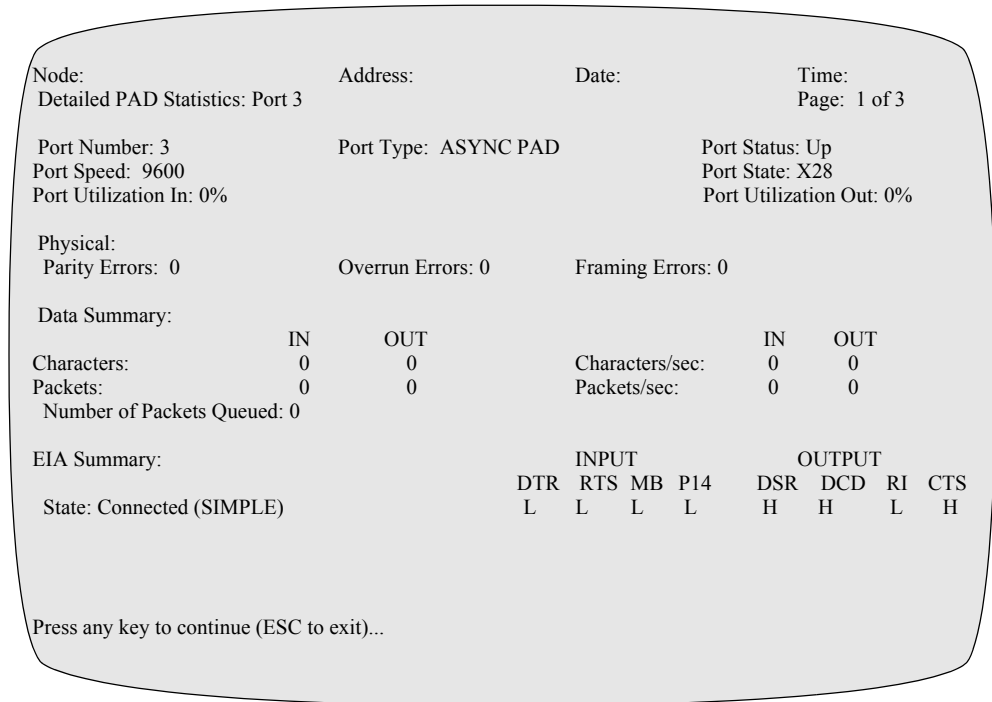

**Figure 11. Example of Detailed PAD Port Statistics, First Screen**

### Description of Terms — First Screen


The first Detailed PAD Port Statistics screen contains this information:

<b>Screen Term</b>	<b>Tells You...</b>
Port Number	Number of the port
Port Type	Type of port: ASYNC PAD
Port Status	Status of the port: Up
Port Speed	The configured port speed
Port State	These are the possible states: <ul style="list-style-type: none"> <li>• X.28: The port is in Command mode</li> <li>• PAD: The port is in Data mode</li> </ul>
Port Utilization: IN/OUT	Percentage of port bandwidth being used

Screen Term	Tells You... (continued)
Physical	Number of Parity, Overrun, and Framing errors since the last reset
Data Summary: IN/OUT	Summary of the characters, packets, and frames being sent and received over the port
EIA Summary	<p>Summary of the EIA control signals being sent and received over the port</p> <p>Possible states are:</p> <ul style="list-style-type: none"> <li>• NULL</li> <li>• Connected (SIMPLE)</li> <li>• Idle, Connected (DTR), Wait For Clear (DTR), Wait for DTR (DTR)</li> <li>• Idle (DTRP), Call Detected (DTRP), Connected (DTRP)</li> <li>• Idle, Call Detected (DIMO), Incoming Call Detected (DIMO), Connected (DIMO), Clear Confirm (DIMO)</li> <li>• Idle, RI On (EMRI), RI Off (EMRI), Wait for RTS (EMRI), Connected (EMRI), Wait for DTR (EMRI)</li> </ul>

**What You See in the Second Screen**

Figure 12 shows the second screen of the Detailed PAD Port Statistics.

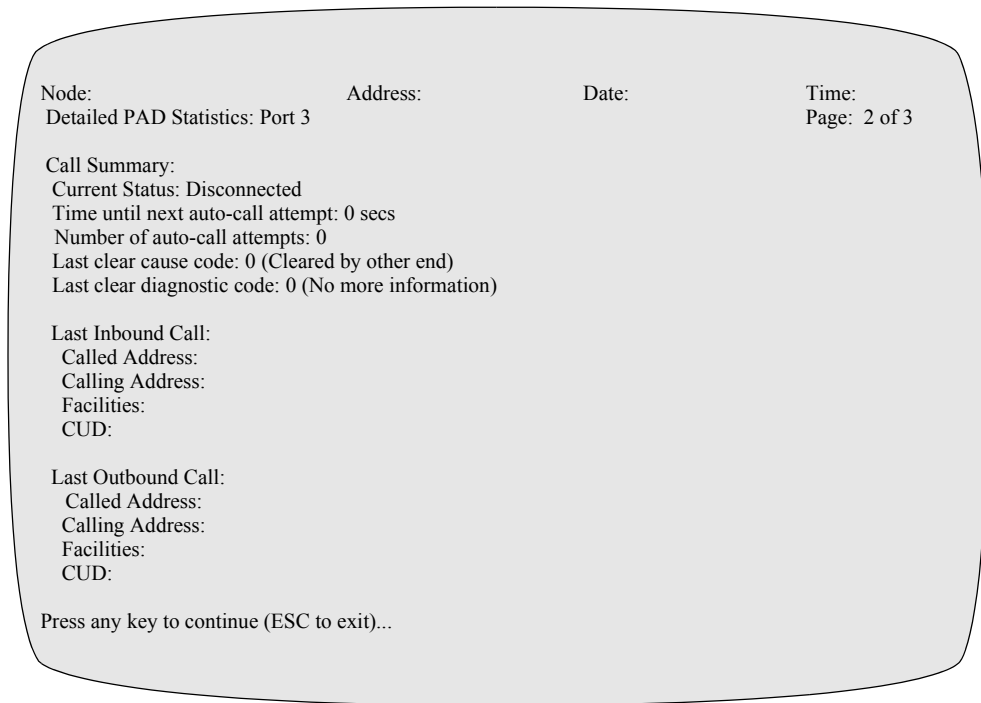

**Figure 12. Example of Detailed PAD Port Statistics, Second Screen**


**Description of Terms — Second Screen**

The second Detailed PAD Port Statistics screen contains this information:

<b>Screen Term</b>	<b>Tells You...</b>
Call Summary	<ul style="list-style-type: none"> <li>• Current Status: Status of the call on the specific port (Disconnect, Calling, Called, Clearing, Connected, Local Copy)</li> <li>• Time Until Next Autocall Attempt: Number of seconds until the next autocall is attempted</li> <li>• Number of Autocall attempts: Number of autocalls that are attempted</li> <li>• Last Clear Cause Code: Last clear cause code received by the port</li> <li>• Last Clear Diagnostic Code: Last clear diagnostic code received by the port</li> </ul>
Last Inbound Call	Called Address, Calling Address, Facilities, and CUD of the last inbound call
Last Outbound Call	Called Address, Calling Address, Facilities, and CUD of the last outbound call

**What You See in the Third Screen**

Figure 13 shows the third screen of the Detailed PAD Port Statistics which lists the Current Running Profile information.

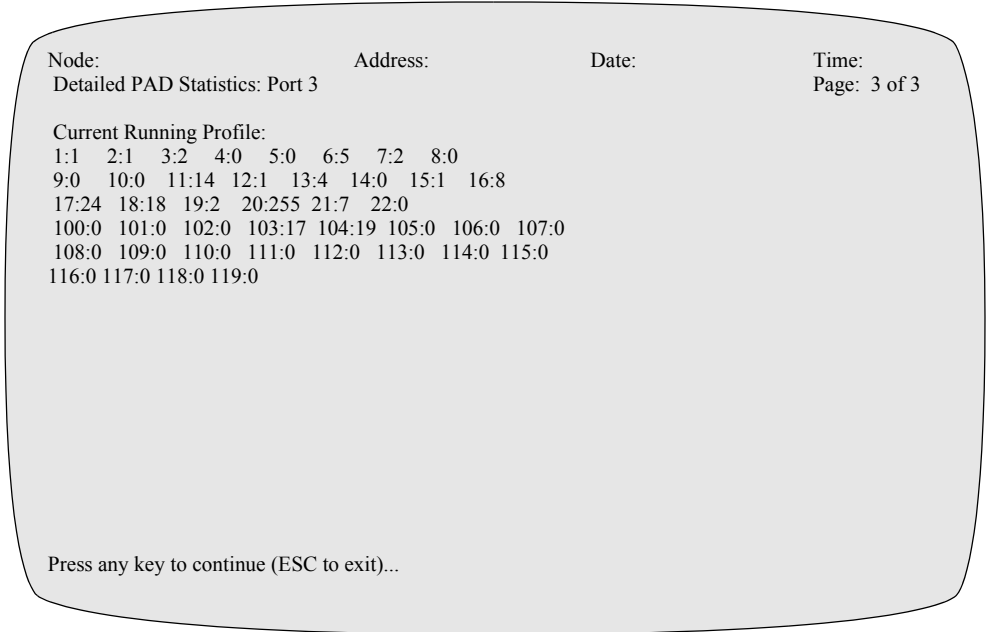

**Figure 13. Example of Detailed PAD Port Statistics, Third Screen**

## ATPAD Ports

### Introduction

This section contains detailed descriptions of ATPAD ports, how they operate, and how to configure them.

## ATPAD Operation

### ATPAD

An ATPAD port operates in either a Command mode or Data mode. This port type is always in the Command mode whenever a call is not taking place.

When the ATPAD is in the Command mode, it receives characters from the attached terminal device, processes them using the ATPAD command processor, and sends a response (or result code) to the terminal. It does not forward the command to the network.

The ATPAD is in Data mode when there is an X.25 network call in place to a remote device. In Data mode, it receives characters from the terminal device, packetizes them, and forwards them through the network to the remote device.

### Result Code Printing Options

You can select one of these formats for printing with the Results Code port parameter:

- ALPHA—Result codes are printed in all capitals. They are printed on a new line and the cursor is advanced to the next new line. (<CR><LF> Result Code <CR><LF>).
- NUM—The numerical equivalent result code is printed followed by a <CR>.
- NONE—No result codes are displayed.

### Data Forwarding Criteria Descriptions

This table describes three criteria used to packetize and forward data to the network.

<i>If you want to...</i>	<i>Then use...</i>
Forward data on full packets.	Forward on full packet. The ATPAD always forwards full packets. You can configure the maximum packet size as 128, 256, 512, or 1024 bytes. You can select one of the other two criteria so that the ATPAD forwards data before a full packet has been assembled.
Packetize and forward the characters received since the last time expiration.	Forward on Data Forwarding Timer. You can use the Data Forwarding Timer in interactive sessions where the host (Echoplex) echoes the characters typed by the terminal equipment. If you want the characters to be echoed as quickly as possible, set the Data Forwarding Timer to a low value. If you set the Data Forwarding Timer to a zero value, you disable the ability to echo characters.
Send records or command to the host and terminated by the same character, for example, <CR>.	Forward on Data Forwarding Character.

## M-bit Handling

M-bit handling allows the ATPAD to split data that is larger than the configured network packet size into packets for transmission on X.25. This is especially useful when the receiving end must identify the packets as part of one data stream.

The ATPAD port starts the data forwarding timer when it splits messages, data, or transactions from the terminal. If the next character arrives before the expiration of the forward timer, M-bit handling sets the first packet's M-bit to 1 and passes the packet to the next layer. M-bit handling also sets the M-bit to 1 for the middle packets and sets the last packet's M-bit to 0.

### ■ Note

Either Data Forwarding Character or Data Forwarding Timer must be enabled when M-bit handling is enabled. Both Data Forwarding Character and Data Forwarding Timer can be enabled simultaneously when M-bit handling is enabled.

## DCD and DTR Control

You can configure your ATPAD connection for Data Carrier Detect (DCD). The DCD setting completes the connection process for DTR control. Choosing the DCD allows the ATPAD to connect like a modem.

The terminal screen displays **OK** only when the DTR pin is high. When the DTR pin's input is high and a call is accepted, the DCD pin's input goes to high. If the call is cleared or the DTR pin's input is low, the DCD pin's input goes to low. The DCD pin's input remains low when no call is in place. If a call is in progress and the DTR pin's input becomes low, the call is cleared. The **No Carrier** message appears on the terminal screen.

## Flow Control

You can configure the ATPAD for either type of flow control:

- Control Signal
- XON/XOFF

If you select Control Signal, the port does not send data if the port's Pin 14 input is low. If the port wants to flow control the attached device, it sets its CTS output low.

If you configure the port for XON/XOFF, the port stops sending data if it receives the configured XOFF character. It resumes transmission when it receives an XON character. You can configure the XOFF and XON characters. If the port wants to flow control the attached device, it sends an XOFF character. Then it sends an XON character when it is ready to receive more data.

If the port's message queue overruns because flow control is not in effect, the port discards data and this alarm is generated:

**Pn - DATA DISCARDED**

where: P is the port identifier, and n is the port number.

**Protocol Identifier**

You can use a Protocol Identifier (PID) to ensure that only calls from other devices using the same PID are accepted.

You configure a PID in the port record. The PID is inserted in the Call User Data field of all Call Request packets generated by the port. All incoming Call requests are checked for the presence of the same PID. If it is not present in the Call Request packet, the call is rejected.

If you leave the PID parameter blank, no PID is inserted in Call Requests, and there is no checking of incoming Call Request PIDs.

**CUD and Facilities**


Call User Data (CUD) and facilities in incoming Call Request packets are ignored except for the PID. If you need to insert CUD and Facility fields in Call Request packets generated by the port, do this:

<b>Step</b>	<b>Action</b>
<b>1</b>	Configure one of the Stored Addresses using the X.28 Call Command format.
<b>2</b>	Insert the appropriate CUD and Facilities fields in the configured Call Command string.
<b>3</b>	Use the ATDSn command referencing the correct Stored Address.

**Network Parity Application**

The application that the network parity feature has been designed for is as follows. An async device is directly connected to the ATPAD, and a call is made to an X.25 host. The ATPAD port currently strips parity on the incoming async data, so that the data on the X.25 link is always 8 bits, no parity. Normally, the PAD at the remote site regenerates parity when it transmits the data. In this application, the connection is to an X.25 host, which is expecting the data to be 7 bits, even parity.

This enhancement allows for selection of the parity requirements for data transmission. This configuration is shown in Figure 14.

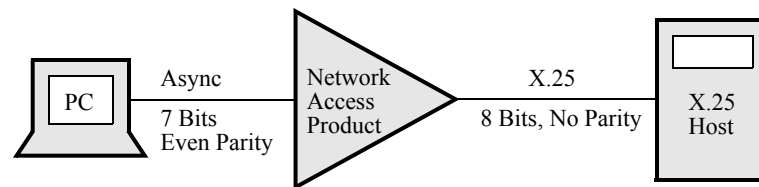

**Figure 14. ATPAD Application Environment**



---

**Response Delay**

To slow down the responses sent by an ATPAD port, configure Response Time using this CSK:

**BYSJWMYCCCKK6HE9NKEE**

This CSK causes all ATPAD ports on the node to delay sending responses to commands for a period of one second.

This feature is designed for this situation. If an automated device that you are using to send commands to an ATPAD port has trouble recognizing the responses when they arrive too quickly, this feature delays responses. This feature is not recommended when the commands are being issued by a human operator.

**■Note**

The ATPAD does not have type-ahead capability, so commands that are sent before the response to the previous command has been received are ignored.

---

**DTR Timeout**

The standard timeout period for DTR Connection Type is 1.5 seconds. That is, DTR must be OFF for 1.5 seconds before it is recognized as being OFF. You can configure a shorter timeout period with this CSK:

**DTZEFG4JHTQY2HCFBJ66**

This CSK changes the timeout period for all ports on the node with DTR Connection Type to 100 ms. To guarantee reliable operation in this mode, a minimum OFF time of 150 ms for DTR is recommended.

---

## ATPAD Port Record Parameters

### Guidelines


Use these guidelines when you enter ATPAD commands:

- Type the commands in upper, lower, or mixed case. If echo is enabled, the commands are echoed in all capitals.
- Use white space (TAB and SPACE) characters anywhere on the command line. The command processor ignores them.
- Edit the buffer using the configurable Back Space Character.
- Be sure that you do not exceed the buffer's maximum length. Otherwise, you get the result code **ERROR**.
- Type **AT<CR>** to clear the command buffer.
- Be aware that you can do the following:
  - Enter commands that the ATPAD does not support. You get the result code OK, but the ATPAD does not act on the unsupported commands. The supported commands are: A/, AT, ATA, ATD, ATH, ATO, and form AT&Dn.
  - Enter multiple commands on a single command line. However, the ATPAD recognizes only the first supported command.

### Configuring The ATPAD

To configure the ATPAD, use the CTP to access the Configure menu and select Port (See Figure 15). You can perform these standard Port Control functions using the CTP:

- Port Boot
- Port Enable
- Port Disable
- Port Busy-out

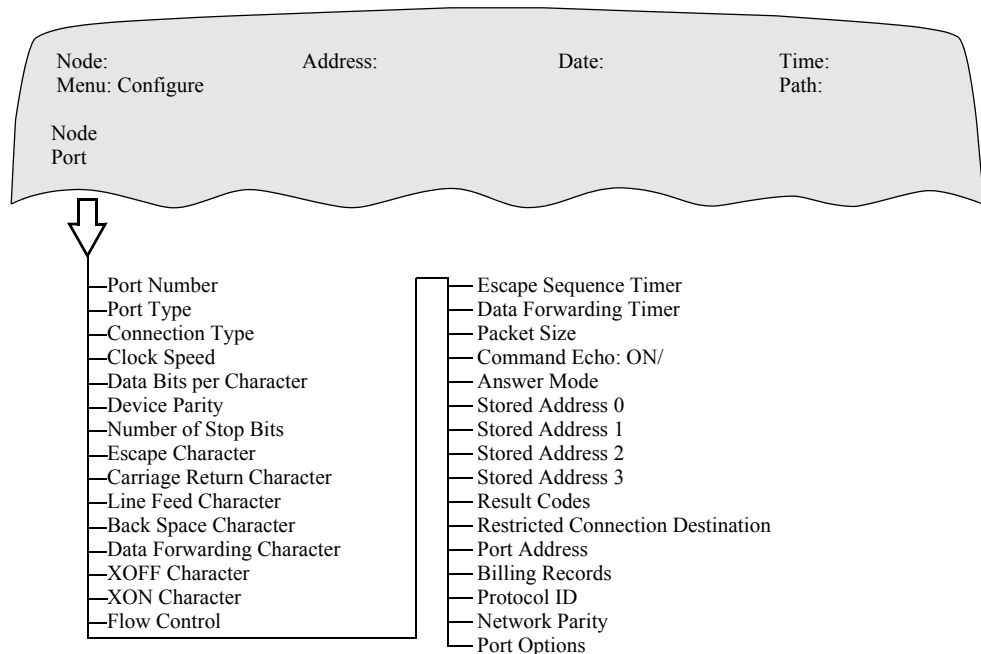

**Figure 15. Configure ATPAD Port Menu**

## Parameters

These are the port parameters when Port Type is set to ATPAD. Any parameter with an asterisk (\*) requires a Node boot.

### ■ Note

If you have enabled Ease of Configuration, you need to boot only the port to make changes to the parameters marked with an asterisk. For more information, refer to the Ease of Configuration section in the introductory portion of the *Basic Protocols Manual*, (Part Number T0106).

### \*Port Type

Range:	NULL, PAD, ATPAD, X25
Default:	PAD
Description:	Specifies the port type. <ul style="list-style-type: none"> <li>• NULL: NULL port</li> <li>• PAD: PAD port</li> <li>• ATPAD: ATPAD port</li> <li>• X25: X.25 port</li> </ul>

### Connection Type

Range:	SIMP, DTR, DCD
Default:	SIMP
Description:	Specifies the control signal handshaking required for a connection to be made to this port. <ul style="list-style-type: none"> <li>• SIMP: Simple, no control signals required</li> <li>• DTR: Dedicated, requires the data terminal ready signal (DTR)</li> <li>• DCD: High when the call is connected; otherwise, it is Low.</li> </ul>

### Clock Speed

Range:	50, 75, 100, 110, 134, 150, 200, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 75/1200
Default:	9600
Description:	Specifies the port speed in bits per second, when using internal clocking. The maximum port speed depends on the Vanguard platform.

**Data Bits**

Range:	7, 8
Default:	8
Description:	<p>Number of bits per character when transmitting and receiving data.</p> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Parity**

Range:	NONE, SPAC, MARK, EVEN, ODD
Default:	NONE
Description:	<p>The parity the port uses when transmitting and receiving data</p> <ul style="list-style-type: none"> <li>• NONE: No parity</li> <li>• SPAC: Space Parity</li> <li>• MARK: Mark Parity</li> <li>• EVEN: Even Parity</li> <li>• ODD: Odd Parity</li> </ul> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Stop Bits**

Range:	1, 1.5, 2
Default:	1
Description:	<p>The number of stop bits generated by the port when transmitting. This parameter has no effect on data received by the port.</p> <ul style="list-style-type: none"> <li>• 1: 1 Stop Bit</li> <li>• 1.5: 1.5 Stop Bits</li> <li>• 2: 2 Stop Bits</li> </ul> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Escape Character**

Range:	0 to 255
Default:	43
Description:	Specifies the character used to escape the Command Mode. <b>■Note</b> Perform a Port boot to implement changes to this parameter.

**Carriage Return Character**

Range:	0 to 255
Default:	13
Description:	Specifies the character used to insert a carriage return. <b>■Note</b> Perform a Port boot to implement changes to this parameter.

**Line Feed Character**

Range:	0 to 255
Default:	10
Description:	Specifies the character used to move the cursor to a new line. <b>■Note</b> Perform a Port boot to implement changes to this parameter.

**Back Space Character**

Range:	0 to 255
Default:	8
Description:	Specifies the character used for character editing. <b>■Note</b> Perform a Port boot to implement changes to this parameter.

### Data Forwarding Character

Range:	0 to 255
Default:	13
Description:	<p>Packets are forwarded to the network when this character is received. To disable this function, set to zero (0).</p> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

### XOFF Character

Range:	0 to 255
Default:	19
Description:	<p>Specifies the value of the ASCII character used for the XOFF function.</p> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

### XON Character

Range:	0 to 255
Default:	17
Description:	<p>Specifies the value of the ASCII character used for the XON function.</p> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

### Flow Control

Range:	NONE, CNTL, XOFF
Default:	NONE
Description:	<p>Specifies the type of flow control that the port uses:</p> <ul style="list-style-type: none"> <li>• NONE: No flow control</li> <li>• CNTL: Control signal flow control</li> <li>• XOFF: XON/XOFF flow control</li> </ul> <p><b>■ Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Escape Sequence Timer**

Range:	1 to 51
Default:	10
Description:	Value of the escape time (in 1/10 second increments).  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Data Forwarding Timer**

Range:	0 to 255
Default:	0
Description:	Specifies how long the system waits (in 1/20 second increments) before data is packetized and sent to the network. To disable this timer, set to zero (0).  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Packet Size**

Range:	128, 256, 512, 1024
Default:	128
Description:	Specifies the maximum size of packets that the ATPAD forms.  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Echo**

Range:	ON, OFF
Default:	ON
Description:	Specifies whether Echo is enabled (ON) or disabled (OFF) when the port is in the Command Mode.  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Answer Mode**

Range:	AUTO, MAN, NONE
Default:	AUTO
Description:	<p>Determines whether incoming calls are answered (using ATA commands) automatically (AUTO) or manually (MAN). NONE bars incoming calls.</p> <p>■ <b>Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Stored Addresses**

Range:	4 sets of 0 to 64 alphanumeric characters
Default:	(blank)
Description:	<p>Used to make calls with the ATDSn command. The addresses may be in mnemonic form (if preceded by a DOT) or in the form of an X.28 call command.</p> <p>The space bar blanks this field.</p> <p>■ <b>Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Result Codes**

Range:	ALPHA, NUM, NONE
Default:	ALPHA
Description:	<p>Specifies how result codes are displayed:</p> <ul style="list-style-type: none"> <li>• ALPHA: spells out the result code</li> <li>• NUM: displays a numeric equivalent for the result code</li> <li>• NONE: suppresses result code generation.</li> </ul> <p>■ <b>Note</b> Perform a Port boot to implement changes to this parameter.</p>

**Restricted Connection Destination:**

Range:	0 to 32 characters
Default:	(blank)
Description:	<p>All calls entering this port are routed to the destination specified in this parameter regardless of route selection table entries. The space bar blanks the field.</p> <p>■ <b>Note</b> Perform a Port boot to implement changes to this parameter.</p>



**Port Address**

Range:	0 to 15 decimal digits
Default:	(blank)
Description:	This is the address of the port inserted into the calling address field of call requests. The space bar blanks the field.  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Billing Records**

Range:	OFF, ON
Default:	OFF
Description:	Controls whether billing records are created for calls on this port.  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Protocol ID**

Range:	0 to 8 hexadecimal digits
Default:	(blank)
Description:	First four bytes of the call user data. If set to zero, PID checking is not performed. The space bar blanks the field.  <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Network Parity**

Range:	NONE, SPAC, MARK, EVEN
Default:	NONE
Description:	Specifies the parity of the data sent to the network by the ATPAD. <ul style="list-style-type: none"> <li>• NONE: No parity, the data is passed as it is received</li> <li>• SPAC: Space parity</li> <li>• MARK: Mark parity</li> <li>• EVEN: Even parity</li> <li>• ODD: Odd parity</li> </ul> <b>■ Note</b> Perform a Port boot to implement changes to this parameter.

**Port Options**

Range:	NONE, MBIT
Default:	NONE
Description:	<p>Enables the M-bit option:</p> <ul style="list-style-type: none"> <li>• NONE: No port option is selected.</li> <li>• MBIT: Sets M-bit for X.25 packets of the configured network packet size.</li> </ul> <p><b>■ Note</b>            Either Data Forwarding Character or Data Forwarding Timer must be enabled when M-bit handling is enabled. Both Data Forwarding Character and Data Forwarding Timer can be enabled simultaneously.</p>

---


## ATPAD Port Statistics

**Function**

When you select Detailed ATPAD Port Statistics, a series of screens appears that provides information about the state and status of the ATPAD port.

**What You See in the First Screen**

Figure 16 illustrates the first screen of Detailed ATPAD Port Statistics.

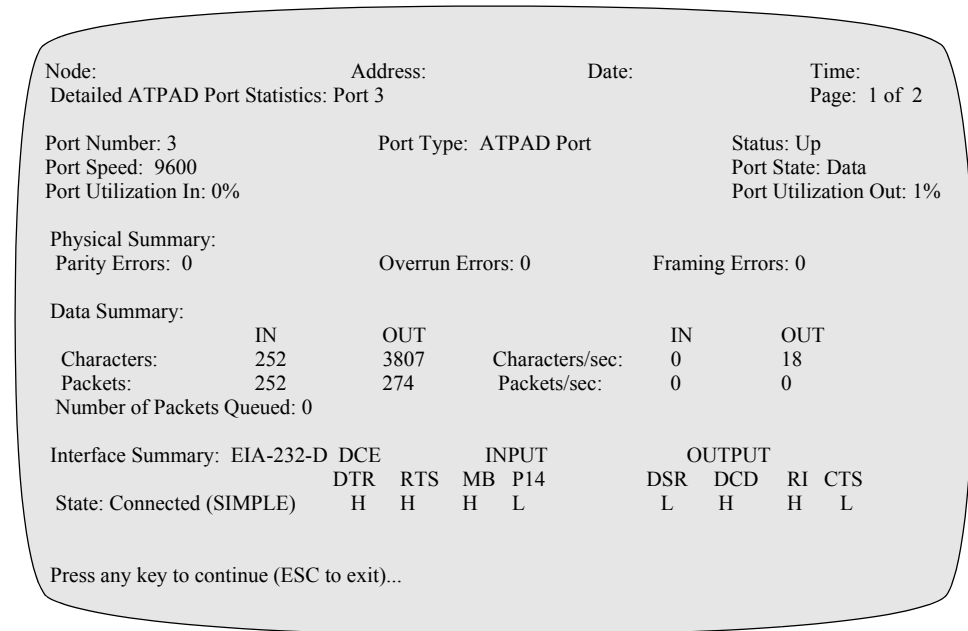

**Figure 16. ATPAD Port Statistics - Screen 1**

**Description of Terms — First Screen**


The first Detailed ATPAD Port Statistics screen contains this information:

<b>Screen Term</b>	<b>Description</b>
Port Number	Number of the port
Port Type	Type of port: ATPAD
Port Status	Status of the port: Up
Port Speed	The configured port speed
Port State	These are the possible states: <ul style="list-style-type: none"> <li>• ATPAD: The port is in Command mode</li> <li>• PAD: The port is in Data mode</li> </ul>
Port Utilization: IN/OUT	Percentage of port bandwidth being used
Physical Summary	Number of Parity, Overrun, and Framing errors since the last reset
Data Summary: IN/OUT	Summary of the characters, packets, and frames being sent and received over the port

<b>Screen Term</b>	<b>Description (continued)</b>
Interface Summary	<p>Summary of the EIA control signals being sent and received over the port</p> <p>These are the possible states:</p> <ul style="list-style-type: none"> <li>• NULL</li> <li>• Connected (SIMPLE)</li> <li>• Idle, Connected (DTR), Wait For Clear (DTR), Wait for DTR (DTR)</li> <li>• Idle (DTRP), Call Detected (DTRP), Connected (DTRP)</li> <li>• Idle, Call Detected (DIMO), Incoming Call Detected (DIMO), Connected (DIMO), Clear Confirm (DIMO)</li> <li>• Idle, RI On (EMRI), RI Off (EMRI), Wait for RTS (EMRI), Connected (EMRI), Wait for DTR (EMRI)</li> </ul>

**What You See in the Second Screen**

Figure 17 illustrates the second screen of Detailed ATPAD Port Statistics.

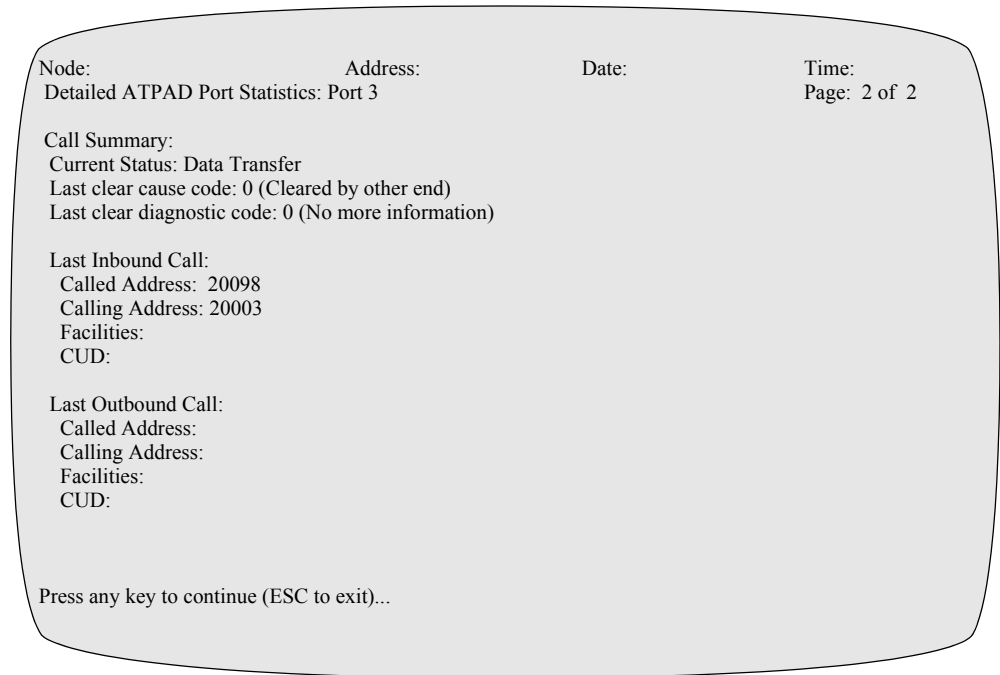

**Figure 17. ATPAD Port Statistics - Screen 2**

**Description of  
Terms — Second  
Screen**

The second Detailed PAD Port Statistics screen contains this information:

<b>Screen Term</b>	<b>Description</b>
Call Summary	<ul style="list-style-type: none"> <li>• Current Status: Status of the call on the specific port (Data Transfer, Calling, Called, Clearing, Connected, Local Copy)</li> <li>• Last Clear Cause Code: Last clear cause code received by the port</li> <li>• Last Clear Diagnostic Code: Last clear diagnostic code received by the port</li> </ul>
Last Inbound Call	Called Address, Calling Address, Facilities, and CUD of the last inbound call
Last Outbound Call	Called Address, Calling Address, Facilities, and CUD of the last outbound call



## Symbols

- #1, PAD Recall 30
- #10, Line Folding 33
- #100, Break Character 37
- #101, Echo Substitution Toggle Character 37
- #102, Echo Substitution Character 37
- #103, XON Character 38
- #104, XOFF Character 38
- #105, Control Signal (EIA-232-D) Data Restraint 38
- #106, Network Parity 39
- #107, Idle Disconnect Timer 39
- #108, Disconnect Character 39
- #109, Form Feed Padding 39
- #110, Esc Forwarding Delay Handling 40
- #111, Echo Control 40
- #112, Dynamic Data Forwarding 41
- #113, Hewlett-Packard Flow Control 41
- #114, PAD Mode 41
- #115, Data Forwarding Criteria 42
- #116, Short Timer Duration 42
- #117, EIA Signalling Action 42
- #118, Message Assembly 43
- #119, DCD to Data Timer Duration 43
- #12, PAD Data Restraint 33
- #13, Line Feed Insertion After CR 34
- #15, Editing 34
- #16, Character Delete 35
- #17, Line Delete 35
- #18, Line Display 35
- #19, Editing Type 35
- #2, Echo 30
- #20, Echo Mask 36
- #21, Parity Treatment 36
- #22, Page Wait 37
- #3, Data Forwarding Character 31
- #4, Idle Timer Delay 31
- #5, Device Flow Control 32
- #6, Service Signals Control 32
- #7, Break Signal Operation 32
- #9, Padding After Carriage Return 33

## A

### APAD

- enabling the CSK 25
- XON/XOFF transmission
  - using X.25 interrupt packets 25

## A (Continued)

### ATPAD

- DTR timeout 59
- response delay 59
- Auto Baud Sequence 11
- Autobaud sequence 24
- Autocall Mnemonic
  - inputting a value 7
  - specifying 7
- Autocall Timeout
  - guidelines 7
- Autocall Timeout (sec) 15
- Autocalling
  - attempts 16
  - SDLC 23
- Autospeed 11, 24
  - implementing 24

## B

- Billing Printer Mnemonic
  - specifying 7
- Billing Records
  - guidelines 7
- Break Character 37
- Break Signal Operation 32

## C

- Call Accept Timeout 17
- Call Control 13
  - setting 7
- Call User Data (CUD) 58
- Calling
  - initiating 22
  - SDLC 23
- Character Delete 35
- Clear packet 17
- Configuration
  - PAD prompt table 26
  - Remote PAD Parameter Table 49
- Connection Type
  - DTRP 8
  - PAD Port 8
  - SIMP 7
- Control Terminal Port 1
- CUG 16
  - membership 16
  - setting for Terminal Control 7

## D

Data Bits per Character [12](#)  
Data Connection Protection [18](#)  
Data Forwarding Character [31](#)  
Data Forwarding Criteria [42](#)  
Data Restraint [38](#)  
DCD Control [57](#)  
DCD to Data Timer Duration [43](#)  
DCP [18](#)  
Device Flow Control [32](#)  
Disconnect Character [39](#)  
DTR timeout [59](#)  
Dynamic Data Forwarding [41](#)

## E

Echo [30](#)  
Echo Control [40](#)  
Echo Mask [36](#)  
Echo Substitution Character [37](#)  
Echo Substitution Toggle Character [37](#)  
Editing [34](#)  
Editing Type [35](#)  
EIA Signalling Action [42](#)  
Esc Forwarding Delay Handling [40](#)

## F

Flow Control [57](#)  
Flow control [32, 33](#)  
Form Feed Padding [39](#)

## G

Group Subaddress [16](#)

## H

Hewlett-Packard Flow Control [41](#)

## I

Idle Disconnect Timer [39](#)  
Idle Timer Delay [31](#)  
Invitation to clear [17](#)

## L

Line Delete [35](#)  
Line Display [35](#)  
Line Feed Insertion After CR [34](#)  
Line Folding [33](#)

## M

Maximum Number of Autocall Attempts [16](#)  
    guidelines [7](#)  
MBC Protocol [4](#)  
    configuring [5](#)  
M-bit handling [57](#)  
Message Assembly [43](#)  
Mnemonic  
    autocalling [22](#)  
    Table  
        specifying Autocall Mnemonic [7](#)

## N

NUI Table  
    guidelines [7](#)  
Number of Stop Bits [12](#)

## P

PAD [53](#)  
PAD Data Restraint [33](#)  
PAD Mode [41](#)  
PAD port  
    additional records [7](#)  
    subaddress [16](#)  
PAD profile parameter [52](#)  
PAD Profile Table [7](#)  
PAD profiles [44, 52](#)  
PAD Prompt Entry Number [15](#)  
    specifying [7](#)  
PAD Prompt table  
    configure [26](#)  
    guidelines [7](#)  
PAD Prompt Text [27](#)  
PAD Recall [30](#)  
Padding After Carriage Return [33](#)  
Page Wait [37](#)  
Parameter Value [52](#)  
Parity [39](#)  
Parity Treatment [36](#)  
PID [58](#)  
Port Speed [10](#)  
Port Statistics  
    port state [53, 69](#)  
Profile Name  
    specifying [7](#)  
Protection Level [18](#)  
Protocol Identifier [58](#)



## R

- Reconnection Timeout [18](#)
- Reconnection Tries Limit [18](#)
- Remote PAD Parameter Table
  - configure [49](#)
- Remote PAD Parameters
  - Number [7](#), [15](#)
  - Table [7](#)
- Response delay [59](#)

## S

- SDLC
  - autocalling mnemonic [23](#)
- Service Signals Control [32](#)
- Short Timer Duration [42](#)
- Speed
  - port [10](#)
- Stop bits [12](#)
- Subaddress [16](#)
  - group [16](#)

## T

- Terminal Control [14](#)
  - guidelines [7](#)
- Timer [31](#)

## X

- XOFF Character [38](#)
- XON Character [38](#)
- XON/XOFF
  - transmitting
    - using X.25 interrupt packets [25](#)





